


ENERGIZER NO. 732



Industry Standard Dimensions in mm (inches)

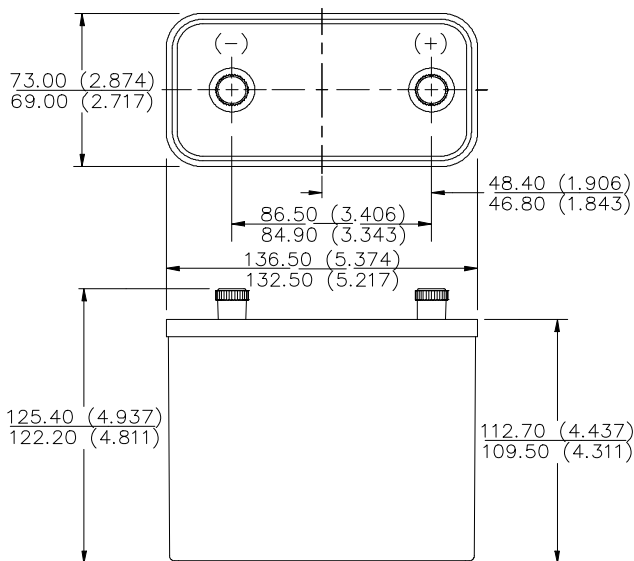

12V
CLASSIC

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
 (No Added Mercury or Cadmium)

Designation: ANSI-926

Battery Voltage: 12 Volts

Operating Temp: -18°C to 55°C (0°F to 130°F)

Average Weight: 1,200 grams (42.5 oz.)

Volume: 1,182 cubic centimeters (72 cubic inch)

Average Capacity: 7.5 Ah to 0.6 volts / cell
 (Rated at 25k ohms continuous at 21°C)

Cell: Eight No. 60 (size "F") in series

Terminals: Screw Post

Jacket: Plastic


INTERNAL RESISTANCE VS. TEMPERATURE

The measurement is an approximation of the battery's actual internal resistance. It is sensitive to the loads and operator technique.


Schedule: Background Load 600 ohms
 Pulse Load 10 ohms
 Pulse Duration 1 second

Temperature	Typical Ri (ohms)
45°C (113°F)	2
21°C (70°F)	2.1
0°C (32°F)	2.4
-21°C (-4°F)	24.0

CONSTANT RESISTANCE PERFORMANCE
 Typical Service

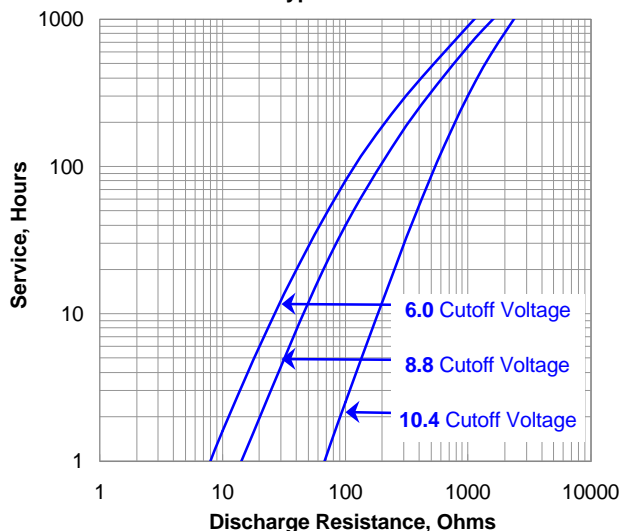

CONSTANT CURRENT DISCHARGE
 Typical Service

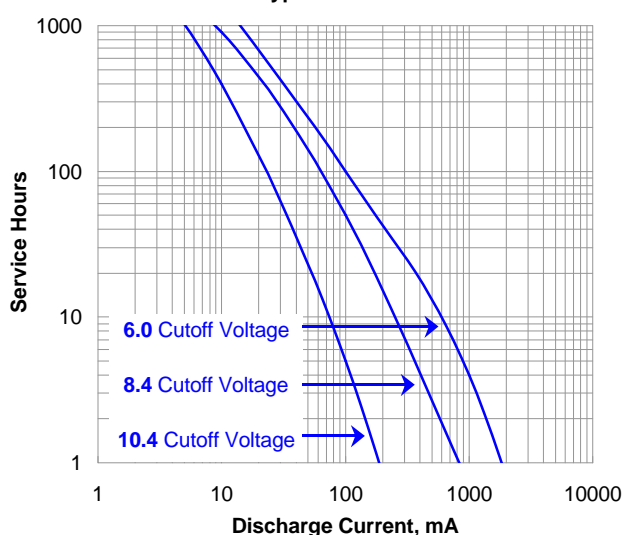

Important Notice





This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved

ENERGIZER NO. 732

Typical Applications

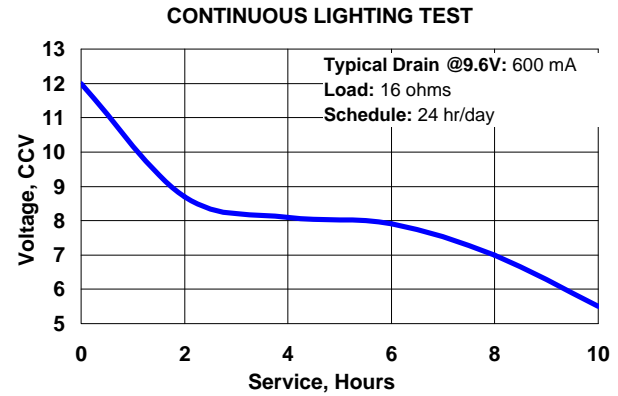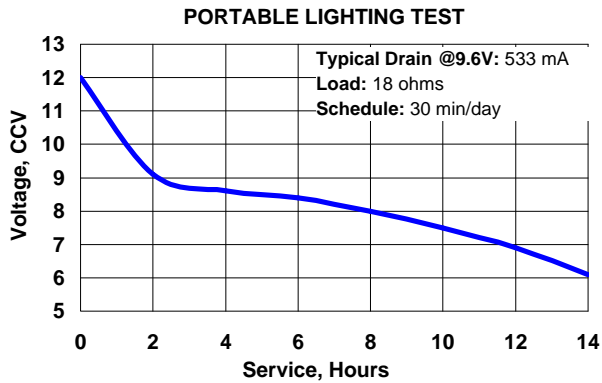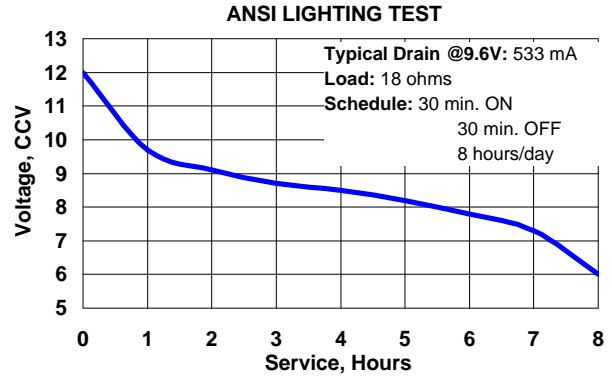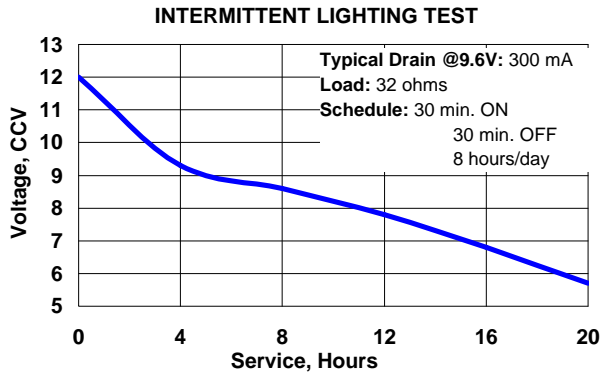

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved