



World Headquarters  
601 Rayovac Drive  
Madison, WI 53711  
Telephone 1-800-331-4522  
Internet [www.rayovac.com](http://www.rayovac.com)

Marketing Data Sheet - Batteries

S6600190  
Issue M  
Memo No: [MDSR0104](#)

Rayovac Stock Number: **922**

Name: **922 GENERAL PURPOSE CARBON ZINC**

**ENGINEERING DATA:**

**Cell Chemistry:** Carbon Zinc

**Designation:** ANSI/NEDA – 922

**Nominal Voltage:** 12 volts

**Approximate Weight:** 5 Lb 12 Oz (2.62 Kg)

**Approximate Volume:** .125 CU FT


**Operating Temp. Range:** -30° C to 55° C  
(-20° F to 130° F)

**Terminals:** Screw

**Shell:** Plastic

**Number Of Cells:** 16

**Environmental:** Meets Environmental Protection Agency (EPA) Requirements For Landfill Disposal. No Mercury Added Formulation  
[Rayovac Material Safety Data Sheets](#)

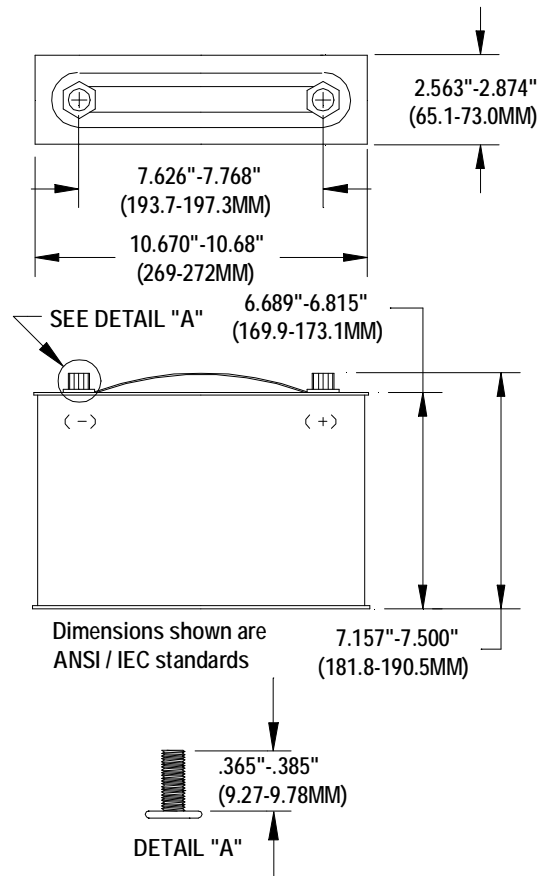

**TYPICAL INITIAL SERVICE AT 70°F (HOURS)  
CUTOFF VOLTAGE**

APPLICATION DUTY CYCLE	LOAD (OHMS)	CURRENT (MA AT 9.6V)	CUTOFF VOLTAGE				MAh CAPACITY To 7.2V
			9.6V	8.8V	8.0V	7.2V	
ELECTRONIC (24 HR/DAY)	820	11.7	1,200	1,575	1,675	1,775	22,000
HIGH RATE RATING (24 HR/DAY)	10	960	3.3	7.0	10.0	12.3	11,450

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.