



World Headquarters
601 Rayovac Drive
Madison, WI 53711
Telephone 1-800-331-4522
Internet www.rayovac.com

Marketing Data Sheet - Batteries

S6600195
Issue Q
Memo No: [MDSR0104](#)

Rayovac Stock Number: **928**

Name: **928 HEAVY DUTY CARBON ZINC**

ENGINEERING DATA:

Cell Chemistry: Carbon Zinc

Designation: ANSI/NEDA – 918D

Nominal Voltage: 6 volts

Approximate Weight: 2 Lb 11 Oz (1.22 Kg)



Approximate Volume: 76 CU IN (1245 CU CM)

Operating Temp. Range: -30° C to 55° C
(-20° F to 130° F)

Terminals: Screw


Shell: Plastic

Environmental: Meets Environmental Protection Agency (EPA) Requirements For Landfill Disposal.
No Mercury Added Formulation
[Rayovac Material Safety Data Sheets](#)

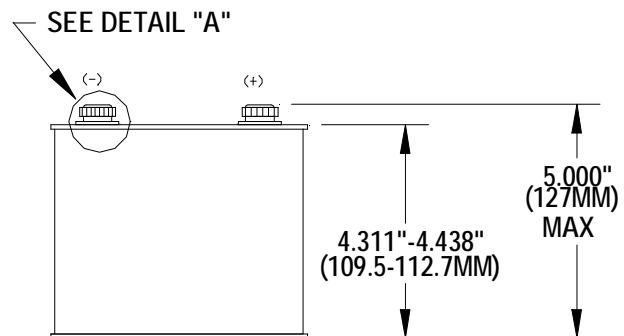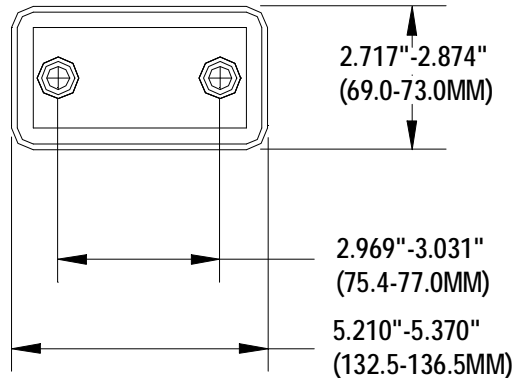

Dimensions shown are ANSI / IEC standards

DETAIL "A"



**TYPICAL INITIAL SERVICE AT 70°F (HOURS)
CUTOFF VOLTAGE**

APPLICATION DUTY CYCLE	LOAD (OHMS)	CURRENT (MA at 4.8V)	CUTOFF VOLTAGE				MAh CAPACITY To 3.6V
			4.4V	4.0V	3.6V	2.6V	
PORTABLE LIGHT (30 MIN/HR-8 HR/DAY)	9.1	527	20.6	25.4	30	37.5	15,300
PORTABLE LIGHT (30 MIN/HR-8 HR/DAY)	6.8	705	13.4	17.7	21.5	27.4	14,400

538375

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.