


ENERGIZER NO. AC146X



Industry Standard Dimensions

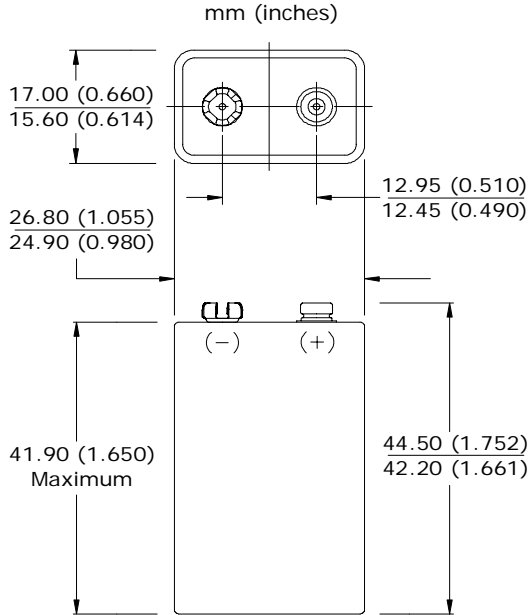


Specifications

Chemical System: Zinc Air (ZnO₂)
Nominal Voltage: 8.4 Volts
Typical Capacity: 1,100 mAh (to 6.0 volts)
 (Rated at 1.1K ohms at 21°C/50% RH)
Typical Weight: 33 grams (1.2 oz)
Typical Volume: 19.6 cubic centimeters (1.2 cubic inch)
Cells: Six No. 635 in series
Jacket: Plastic
Terminal: Snap

Typical Discharge Characteristics

Schedule: 24 hours/day
Typical Drain @ 7.6V:
 10 milliamperes
Load: 750 ohms

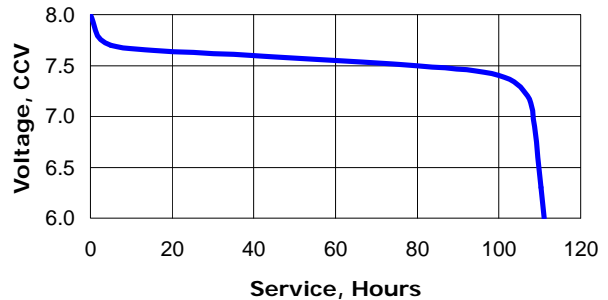


Simulated Application Test

Estimated Average Service
 at 21°C (70°F) and 50% RH

Schedule:	Typical Drains: at 7.6V (milliamperes)	Load (ohms)	Cutoff 6.0V (hours)
24 Hours/Day	10	750	110
24 Hours/Day	7	1,100	157

Typical Discharge Characteristics

Schedule: 24 hours/day
Typical Drain @ 7.6V:
 7 milliamperes
Load: 1,100 ohms

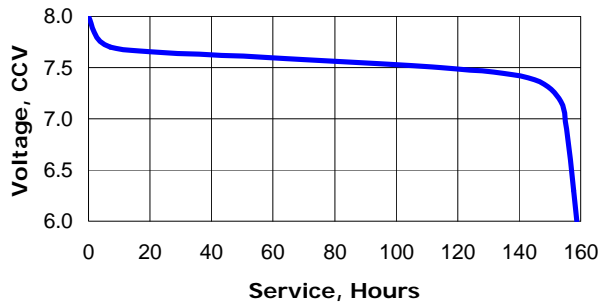

Important Notice

This data sheet contains typical information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

©Eveready Battery Company, Inc. - All Rights Reserved