

Li/MnO₂ Primary System


UB2776 12V Battery

Type BA-5368/U


(Equivalent to NSN-6135-01-455-7947)



27.68
(1.09)



24.66
(1.7)

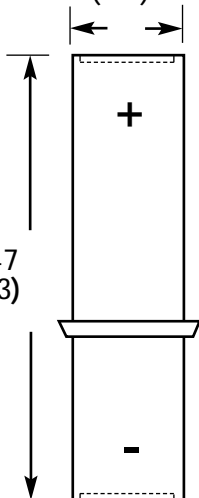

77.47
(3.03)

Maximum
Dimensions
in mm
(inches)

System: Lithium/Manganese Dioxide

Designation: BA-5368/U

Nominal Voltage: 12.0 Volts

Capacity (C): 1Ahr @ 40 mA to 8V @ 23°C

Max. Discharge: 320 mA Continuous

Weight: 76 grams max.

Oper. Temp. Range: -30° to 72°C

Storage Temp. Range: -40° to 95°C

Volume: 37 cm³

Terminals: Nickel Plated Contacts

Housing: Plastic Housing

