






DJW12-24(12V26AH)

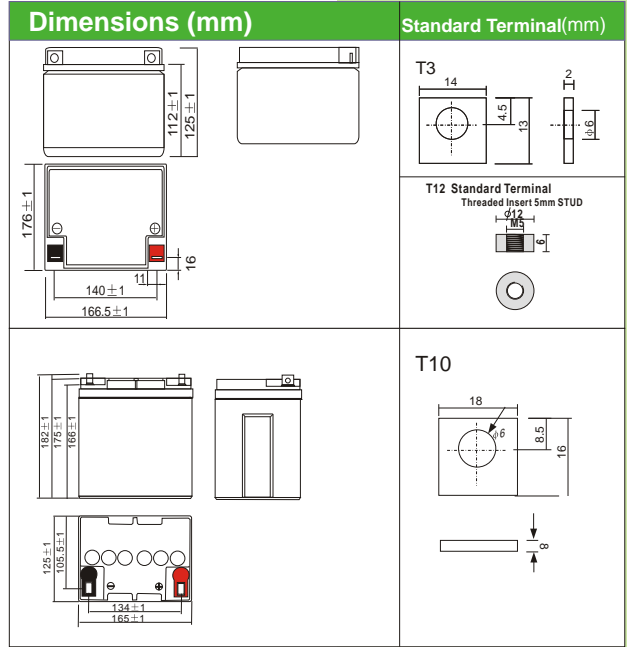

Physical Specification			
Nominal Voltage		12V	12V
Nominal Capacity (20HR)		26AH	26AH(H)
Dimension	Length	176 ± 1mm (6.93inches)	165 ± 1mm (6.50 inches)
	Width	166.5 ± 1mm (6.56 inches)	125 ± 1mm (4.92 inches)
	Container Height	125 ± 1mm (4.92 inches)	175 ± 1mm (6.89 inches)
	Total Height (with Cover)	125 ± 1mm (4.92 inches)	182 ± 1mm (7.17 inches)
Weight		Approx 7.2kg (15.88lbs)	Approx 9.0kg (20.29lbs)
Standard Terminal		T3/T12(standard)	T10 (standard)

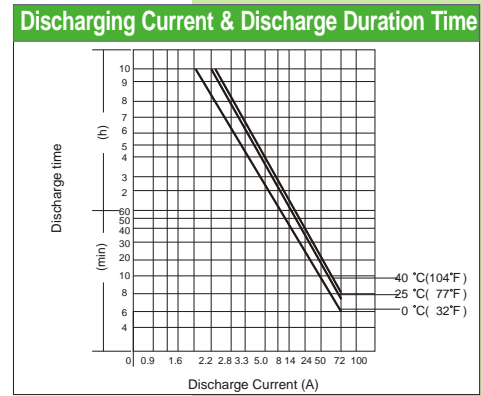

Electrical Specification					
Rated Capacity	20 hour rate (1.3 A)	26AH	Constant-Voltage	Cycle	Initial Charging Current less than 7.2A. Voltage 14.4V~ 15.0V at 25°C (77°F) Temp. Coefficient -30mV/C
	10 hour rate (2.4 A)	24AH			
	5 hour rate (4.42A)	22.1AH			
	1 hour rate (16.1A)	16.1AH			
Capacity affected by Temperature	15minute rate (50.96 A)	12.74AH	Charge	Standby	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C (77°F) Temp. Coefficient -20mV/C
	40°C (104F)	103%			
	25°C (77F)	100%			
	0°C (32F)	86%			

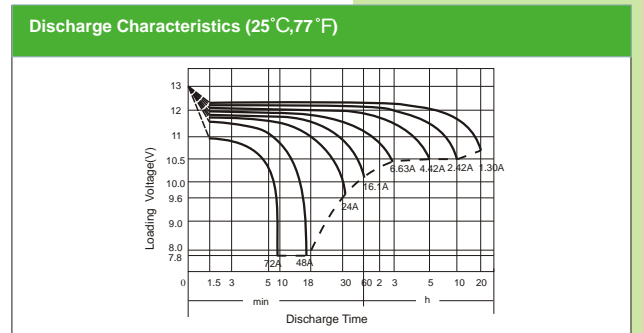

Constant Current (Amp) and Constant Power (Watt) Discharge Table (25°C, 77°F)												
Time(minute) Final voltage/Cell	5	10	15	20	30	45	60	120	180	300	600	1200
	Amp/Watt/Cell	1.3	1.3	1.3	1.3	1.6	1.6	1.67	1.7	1.75	1.75	1.8
A	104.00	74.10	50.96	41.60	29.00	20.80	16.10	9.10	6.63	4.42	2.42	1.30
W	186.16	139.36	96.98	81.38	58.76	41.34	31.98	18.10	13.18	8.84	4.84	2.61