



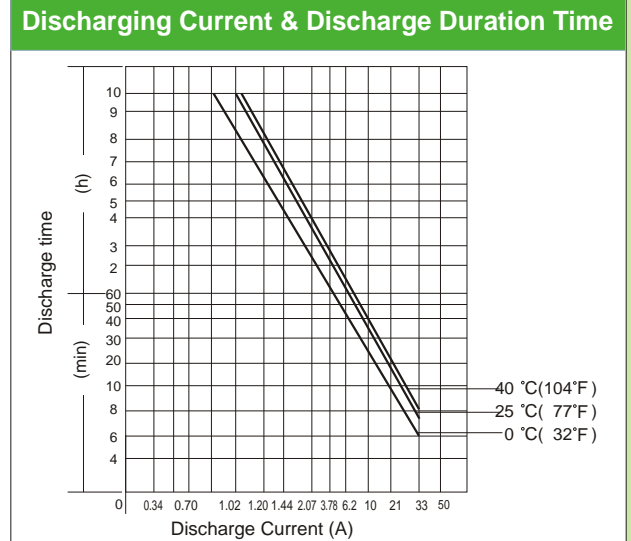


DJW6-10(6V10.5AH)

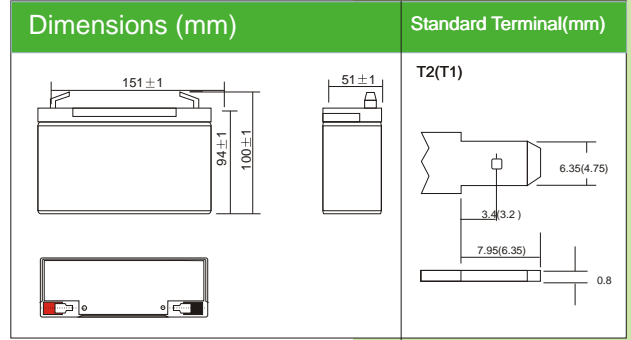

PHYSICAL SPECIFICATION		
Nominal Voltage	6V	
Nominal Capacity (20HR)	10.5AH	
Dimension	Length	151 ± 1mm (5.95 inches)
	Width	51 ± 1mm (2.01 inches)
	Container Height	94 ± 1mm (3.70 inches)
	Total Height (with Terminal)	100 ± 1mm (3.94 inches)
Weight	Approx 1.8kg (3.97lbs)	
Standard Terminal	T2 /T1(standard)	

Electrical Specification					
Rated Capacity	20 hour rate (0.525 A)	10.5AH	Constant-Voltage Charge	Cycle	Initial Charging Current less than 3.0A. Voltage 7.20V~ 7.50V at 25°C (77°F) Temp. Coefficient -15mV/C
	10 hour rate (0.98 A)	9.8AH			
	5 hour rate (1.87A)	9.35AH			
	1 hour rate (6.82A)	6.82AH			
Capacity affected by Temperature	15minute rate (21.56A)	5.39AH	Standby	No limit on Initial Charging Current Voltage 6.75V~6.90V at 25°C (77°F) Temp. Coefficient - 10mV/C	
	40C (104F)	103%			
	25C (77F)	100%			
	0C (32F)	86%			

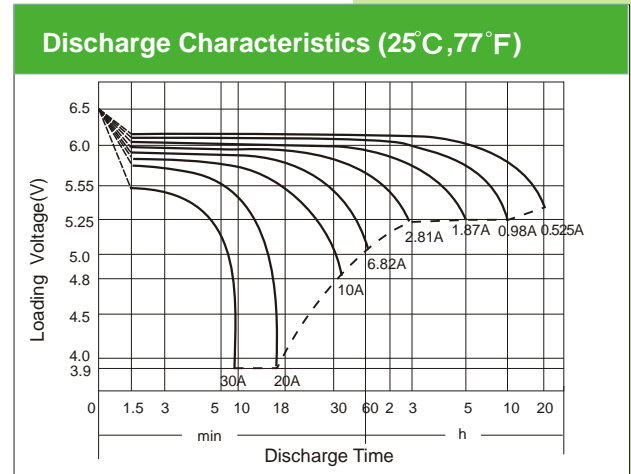

Constant Current (Amp) and Constant Power (Watt) Discharge Table (25°C, 77°F)												
Time(minute) Final voltage/Cell	5	10	15	20	30	45	60	120	180	300	600	1200
	Amp/Watt/Cell	1.3	1.3	1.3	1.3	1.6	1.6	1.67	1.7	1.75	1.75	1.8
A	44.00	31.35	21.56	17.60	12.65	8.80	6.82	3.85	2.81	1.87	0.98	0.525
W	78.76	58.96	41.03	34.43	24.86	17.49	13.53	7.66	5.58	3.74	1.96	1.05