






DJW6-36(6V36AH)

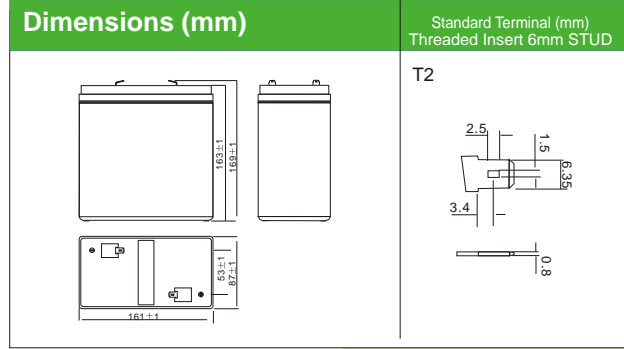

Physical Specification		
Nominal Voltage		6V
Nominal Capacity (10HR)		36AH
Dimension	Length	161 ± 1mm (25.4 inches)
	Width	87 ± 1mm (3.43 inches)
	Container Height	163 ± 1mm (6.42 inches)
	Total Height (with Terminal)	169 ± 1mm (6.65 inches)
Weight		Approx 6.2kg (13.67lbs)
Standard Terminal		T2

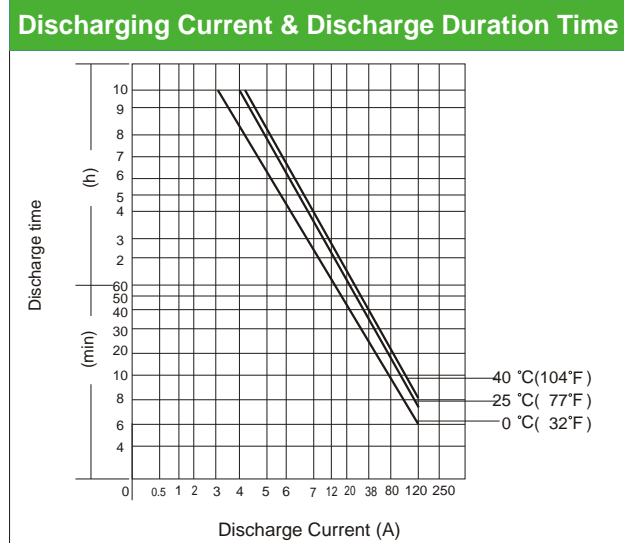

Electrical Specification					
Rated Capacity	20 hour rate (1.80 A)	36 AH	Constant-Voltage	Cycle	Initial Charging Current less than 10.8A. Voltage 7.2V~ 7.5V at 25°C (77°F) Temp. Coefficient -15mV/C
	10 hour rate (3.35A)	33.5 AH			
	5 hour rate (6.12A)	30.6 AH			
	1 hour rate (22.32A)	22.32AH			
	15 minute rate (70.56A)	17.64AH			
Capacity affected by Temperature	40C (104F)	103%	Charge	Standby	No limit on Initial Charging Current Voltage 6.75V~6.9V at 25°C (77°F) Temp. Coefficient - 10mV/C
	25C (77F)	100%			
	0C (32F)	86%			

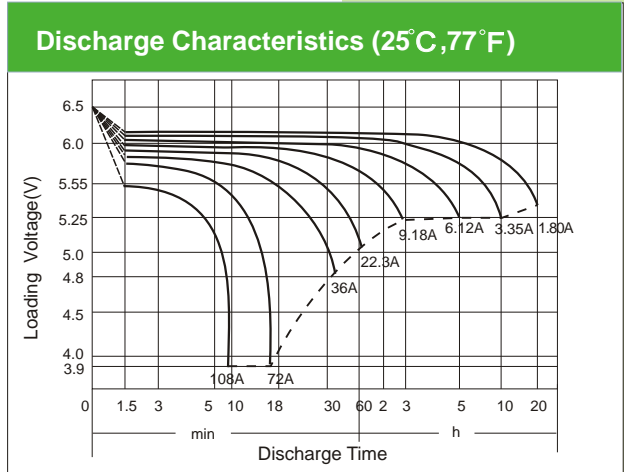

Constant Current (Amp) and Constant Power (Watt) Discharge Table (25°C, 77°F)

Time(minute) Final voltage/Cell	Constant Current (Amp) and Constant Power (Watt) Discharge Table (25°C, 77°F)											
	5	10	15	20	30	45	60	120	180	300	600	1200
Amp/Watt/Cell	1.3	1.3	1.3	1.3	1.6	1.6	1.67	1.7	1.75	1.75	1.75	1.8
A	144.00	102.60	70.56	57.60	41.40	28.80	22.32	12.60	9.18	6.12	3.35	1.80
W	257.76	192.96	134.28	112.68	81.36	57.24	44.28	25.06	18.25	12.24	6.70	3.62