






DJW6-4.5(6V4.5AH)

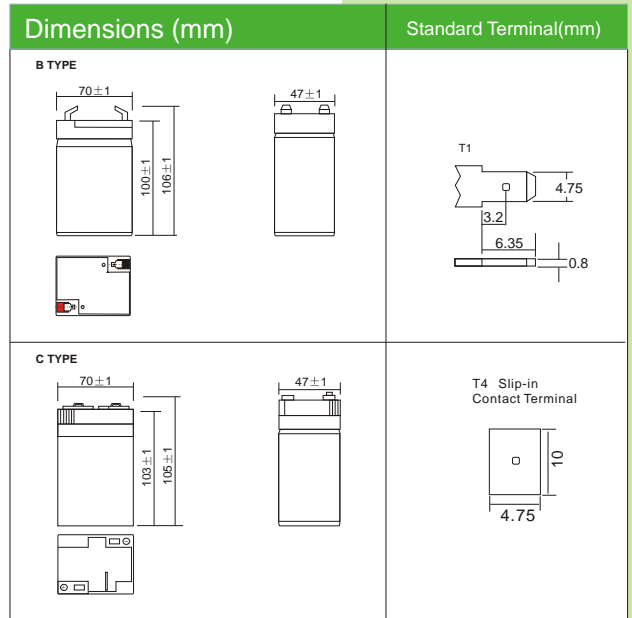

PHYSICAL SPECIFICATION		
Nominal Voltage		6V
Nominal Capacity (20HR)		4.6AH
Dimension	Length	70 ± 1mm (2.76 inches)
	Width	47 ± 1mm (1.85 inches)
	Container Height	100 ± 1mm (3.94 inches)
	Total Height (with Terminal)	106 ± 1mm (4.17 inches)
Weight		Approx 0.81kg (1.79lbs)
Standard Terminal		T1 / T4(Standard)

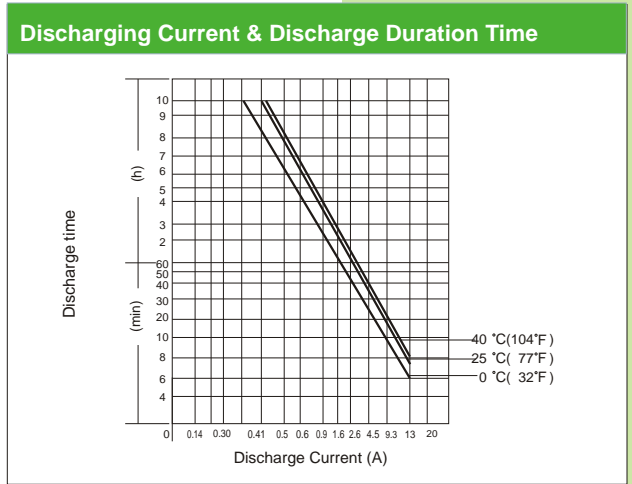

ELECTRICAL SPECIFICATION					
Rated Capacity	20 hour rate (231mA)	4.6AH	Constant-Voltage	Cycle	Initial Charging Current less than 1.35A. Voltage 7.20V~ 7.50V at 25°C (77°F) Temp. Coefficient -15mV/C
	10 hour rate (410mA)	4.1AH			
	5 hour rate (740mA)	3.7AH			
	1 hour rate (2.85 A)	2.85AH			
	15minute rate (9.02 A)	2.255AH			
Capacity affected by Temperature	40C (104F)	103%	Charge	Standby	No limit on Initial Charging Current Voltage 6.75V~6.90V at 25°C (77°F) Temp. Coefficient - 10mV/C
	25C (77F)	100%			
	0C (32F)	86%			

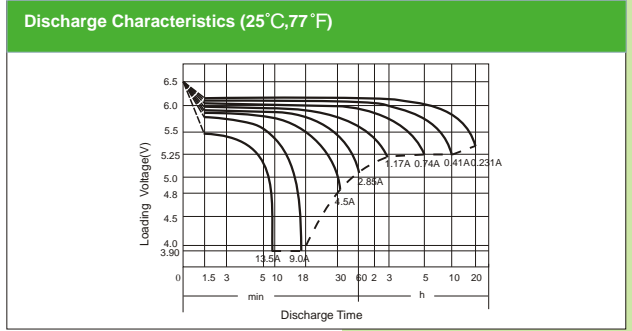

Constant Current (Amp) and Constant Power (Watt) Discharge Table (25°C, 77°F)												
Time(minute) Final voltage/Cell	5	10	15	20	30	45	60	120	180	300	600	1200
	Amp/Watt/Cell	1.3	1.3	1.3	1.3	1.6	1.6	1.67	1.7	1.75	1.75	1.8
A	18.40	13.11	9.02	7.36	5.29	3.68	2.85	1.61	1.17	0.74	0.41	0.231
W	32.94	24.66	17.16	14.40	10.40	7.31	5.66	3.20	2.33	1.56	0.82	0.46