


## ENERGIZER NO. HS14196



Industry Standard Dimensions in mm (inches)

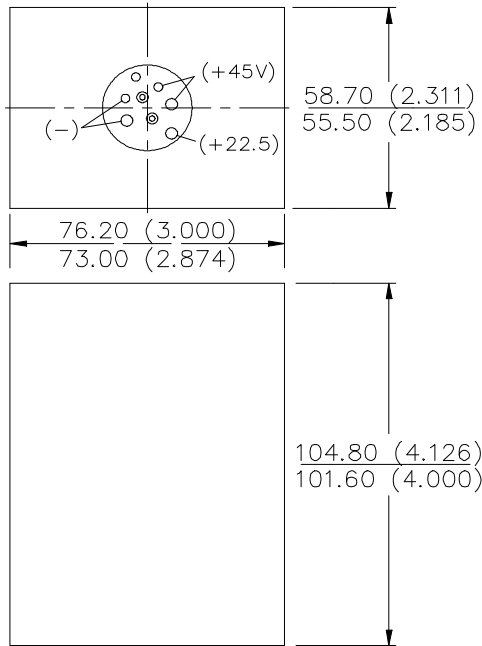


NOT INTENDED FOR RETAIL TRADE

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI / NEDA-205C, IEC-30R6  
**Battery Voltage:** 22.5, 45 Volts  
**Average Weight:** 508 grams (18 oz.)  
**Volume:** 469 cubic centimeters (28.6 cubic inch)  
**Average Capacity:** 950 mAh to 1.3 volts  
 (Rated at 25 mA continuous drain at 21°C)  
**Cells:** Thirty No. 15 (size 'AA') in series  
**Jacket:** Paper

### TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

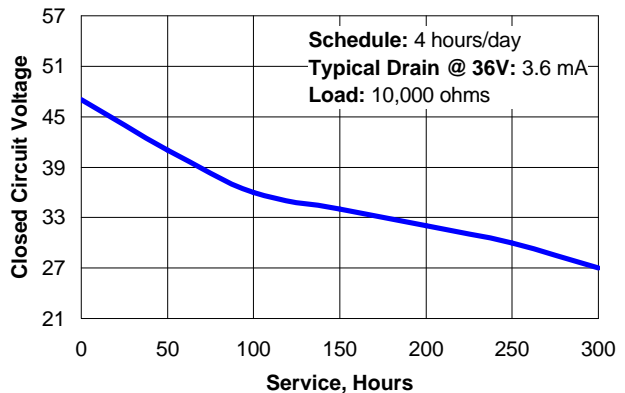

### Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 36V (milliamperes)	Load (ohms)	Cutoff Voltage			
			27V	30V	33V	36V
4 hours/day	3.6	10,000	300	255	175	100
4 hours/day	7.2	5,000	140	120	72	50
4 hours/day	14.4	2,500	54	45	27	18

Schedule:	Load (ohms)	Cutoff Amperage		
		2A	2.5A	3A
1 second ON, 4 seconds rest 1 second ON, 4 seconds rest 1 second ON, 3 cycles / day intervals of 3, 3, and 18 hours 5 days / week	2	100	90	80

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved