



Li-ion Rechargeable


BATTERY

*The heart of next-generation
mobile devices*

Discharge Rate Characteristics



ICF413352A 1CmA=740mA
Charge : CC-CV 0.5C-4.2V 74mA cut-off at 25°C
Discharge : CC 0.2C/0.5C/1.0C/2.0C 3V cut-off at 25°C

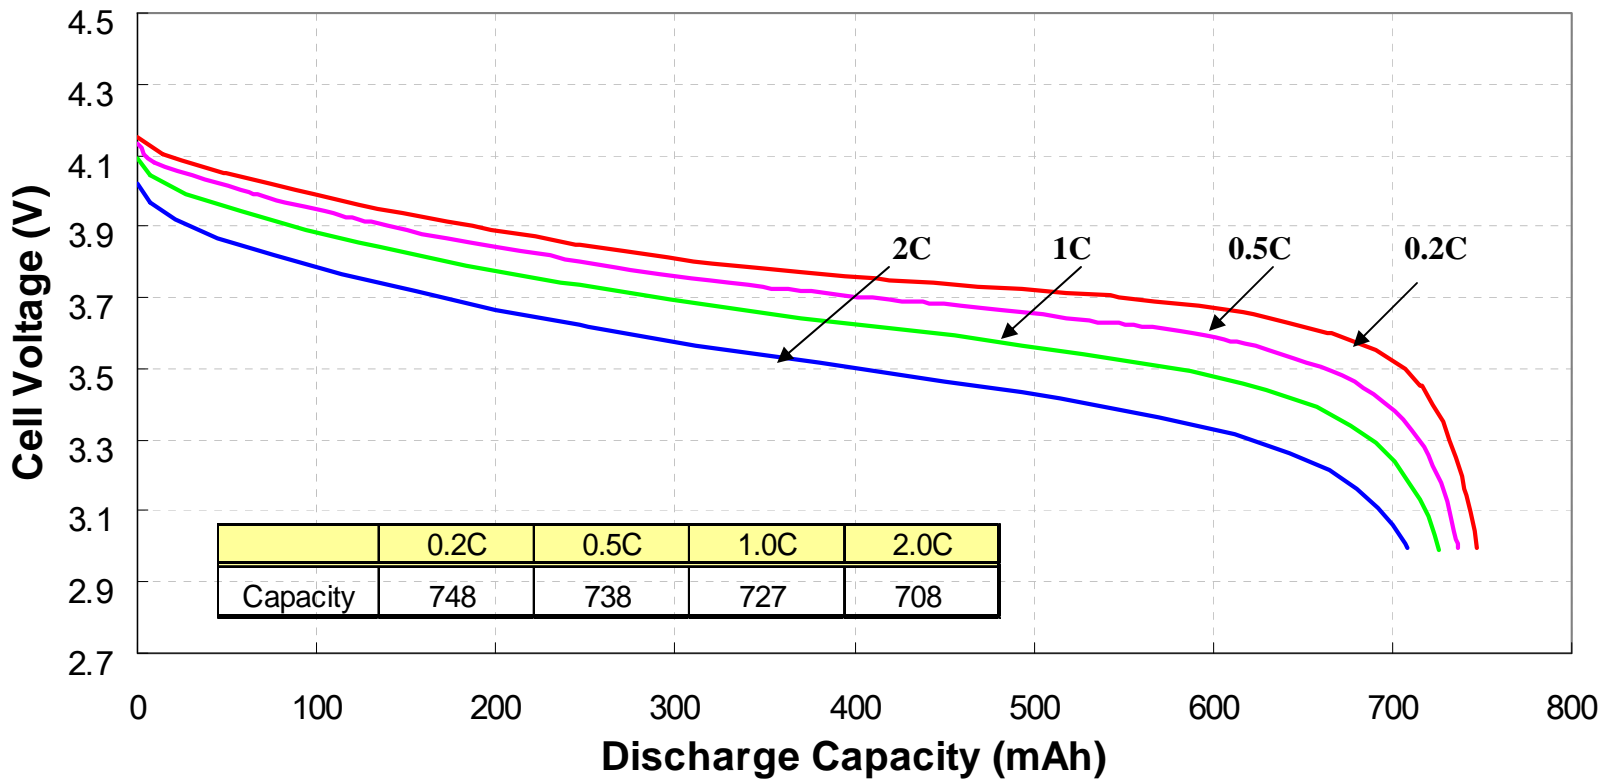


Discharge Temperature Characteristics (I)



ICF413352 1CmA=740mA

Charge : CC-CV 0.5C-4.2V 74mA cut-off at 25°C

Discharge : CC 0.5C 3.0V cut-off at -20°C/10°C/0°C /25°C /40°C /60°C(after 4h standing)

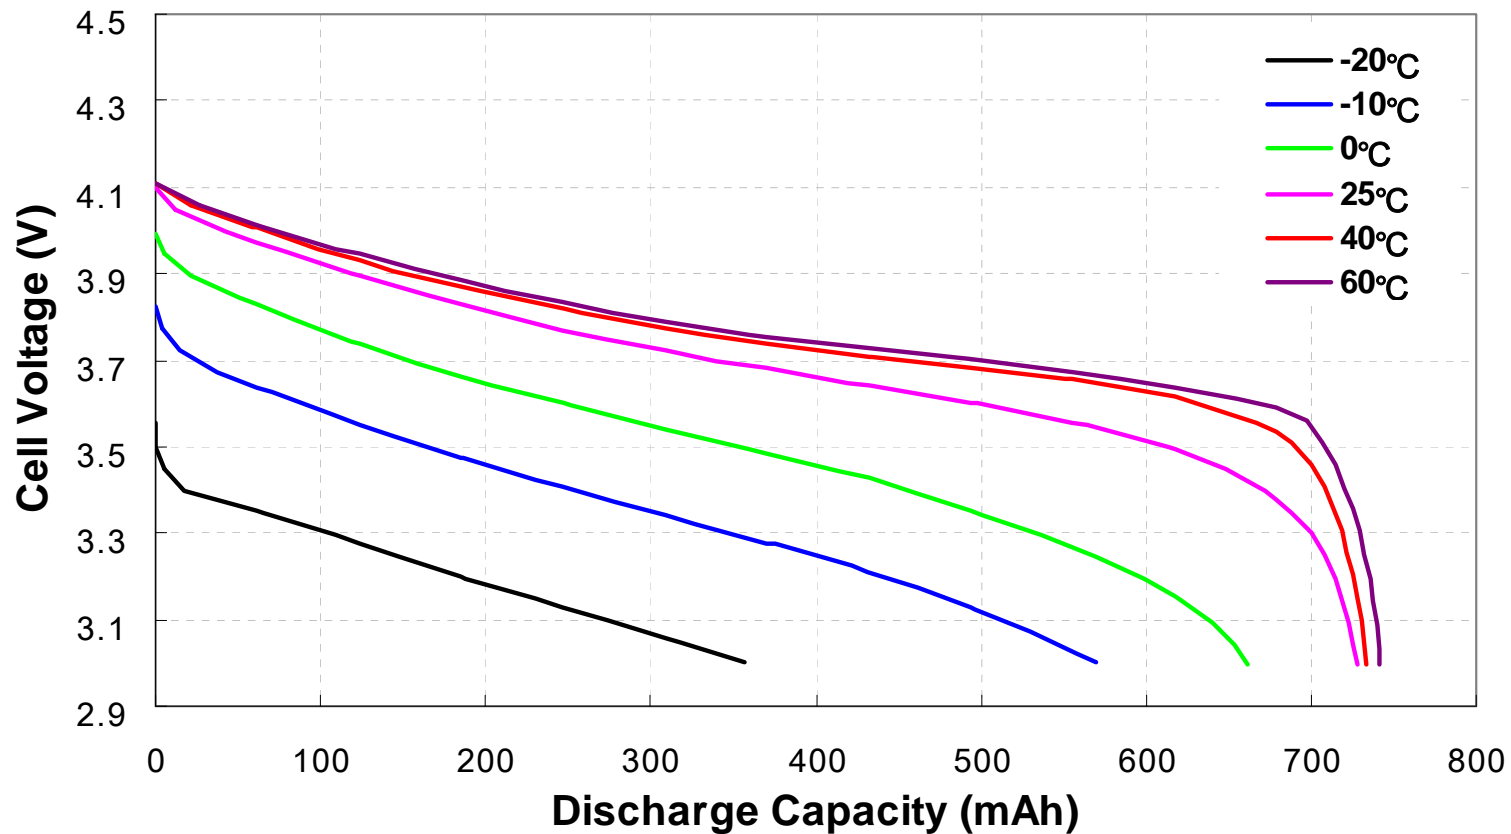


Cycle Life : Capacity Retention



ICF413352A 1CmA=740mA

Charge : CC-CV 1.0C-4.2V 74mA cut-off at 25°C

Discharge : CC 1.0C 3.0V cut-off at 25°C

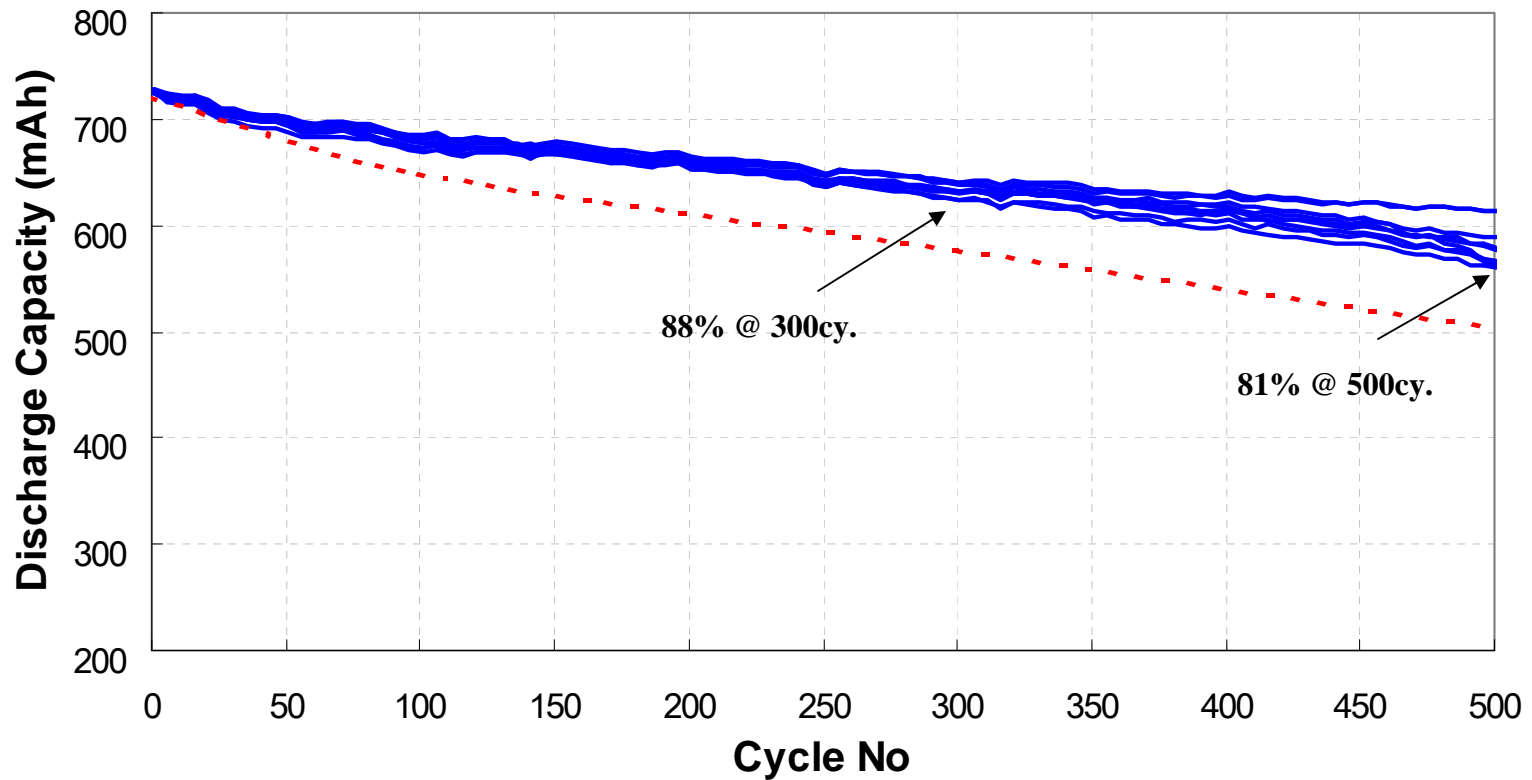

Confidential

* Percentage is an index of nominal capacity (720mAh).