

Laminated Film Case ICF473352



Confidential


Discharge Rate Characteristics(CorePack)



ICF473352 1CmA=820mA

Charge : CC-CV 0.5C-4.2V 82mA cut-off at 25°C

Discharge : CC 0.2C/0.5C/1.0C/2.0C 3V cut-off at 25°C

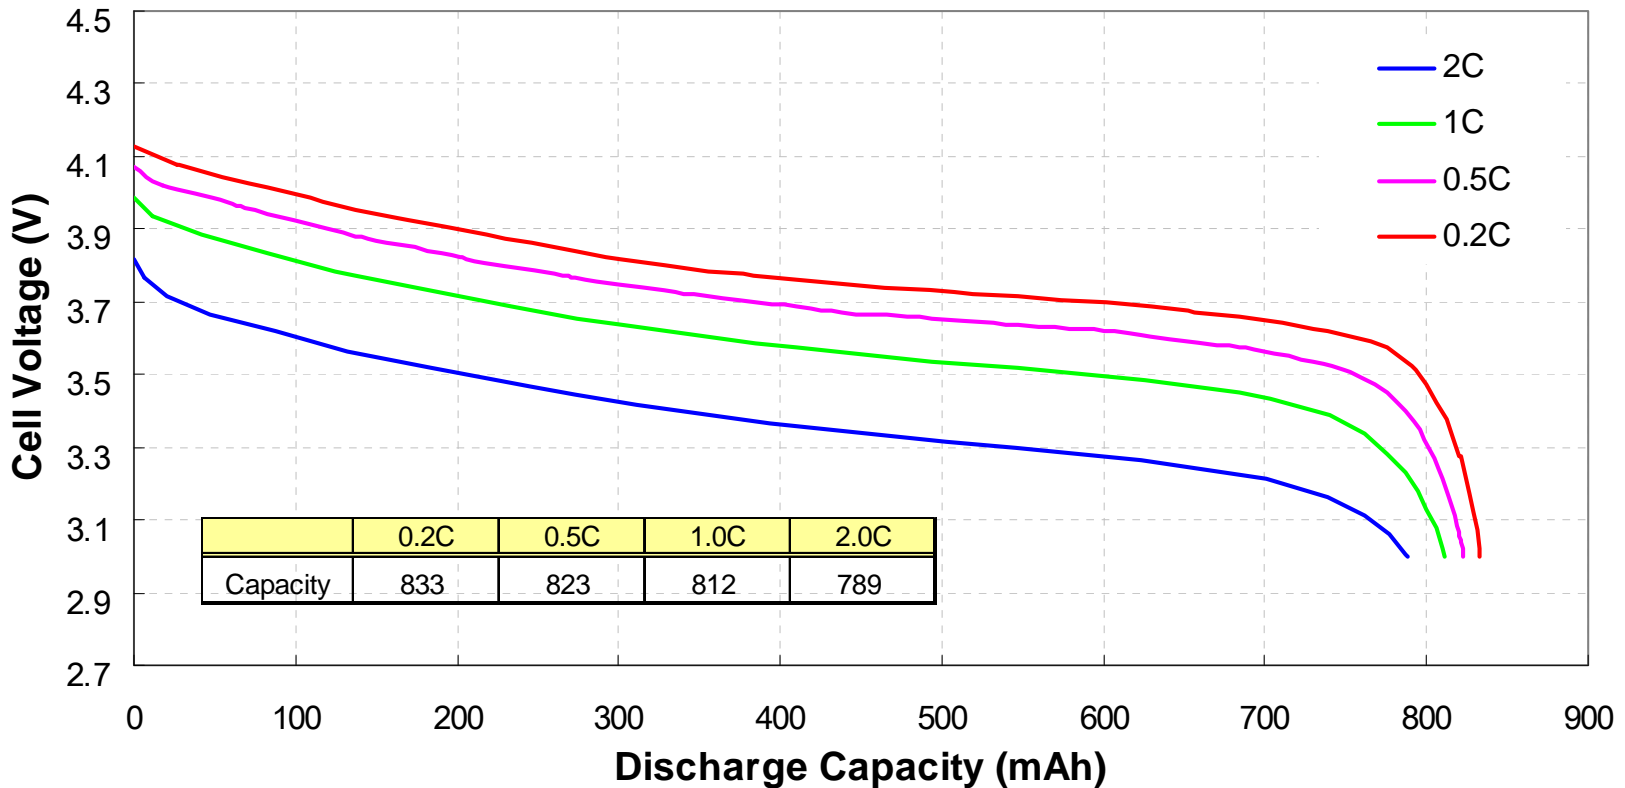


Discharge Temperature Characteristics (I)



ICF473352 1CmA=820mA

Charge : CC-CV 0.5C-4.2V 82mA cut-off at 25°C

Discharge : CC 0.5C 3.0V cut-off at -20°C/10°C/0°C /25°C /40°C /60°C(after 4h standing)

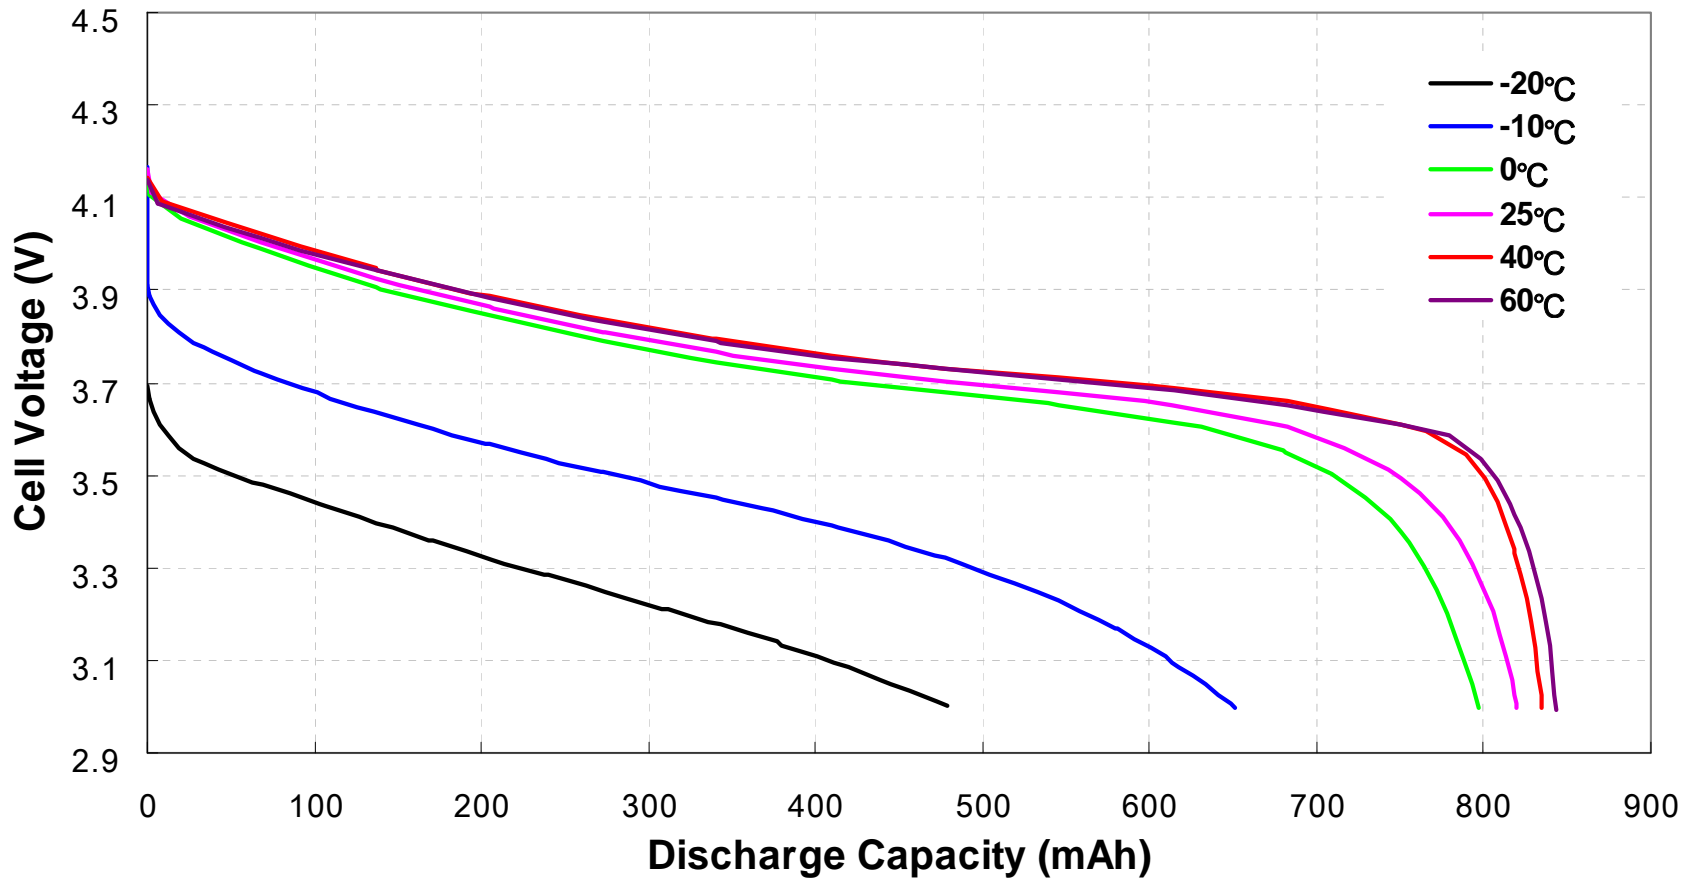


Cycle Life : Capacity Retention



ICF473352 1CmA=820mA

Charge : CC-CV 1.0C-4.2V 82mA cut-off at 25°C

Discharge : CC 1.0C 3.0V cut-off at 25°C

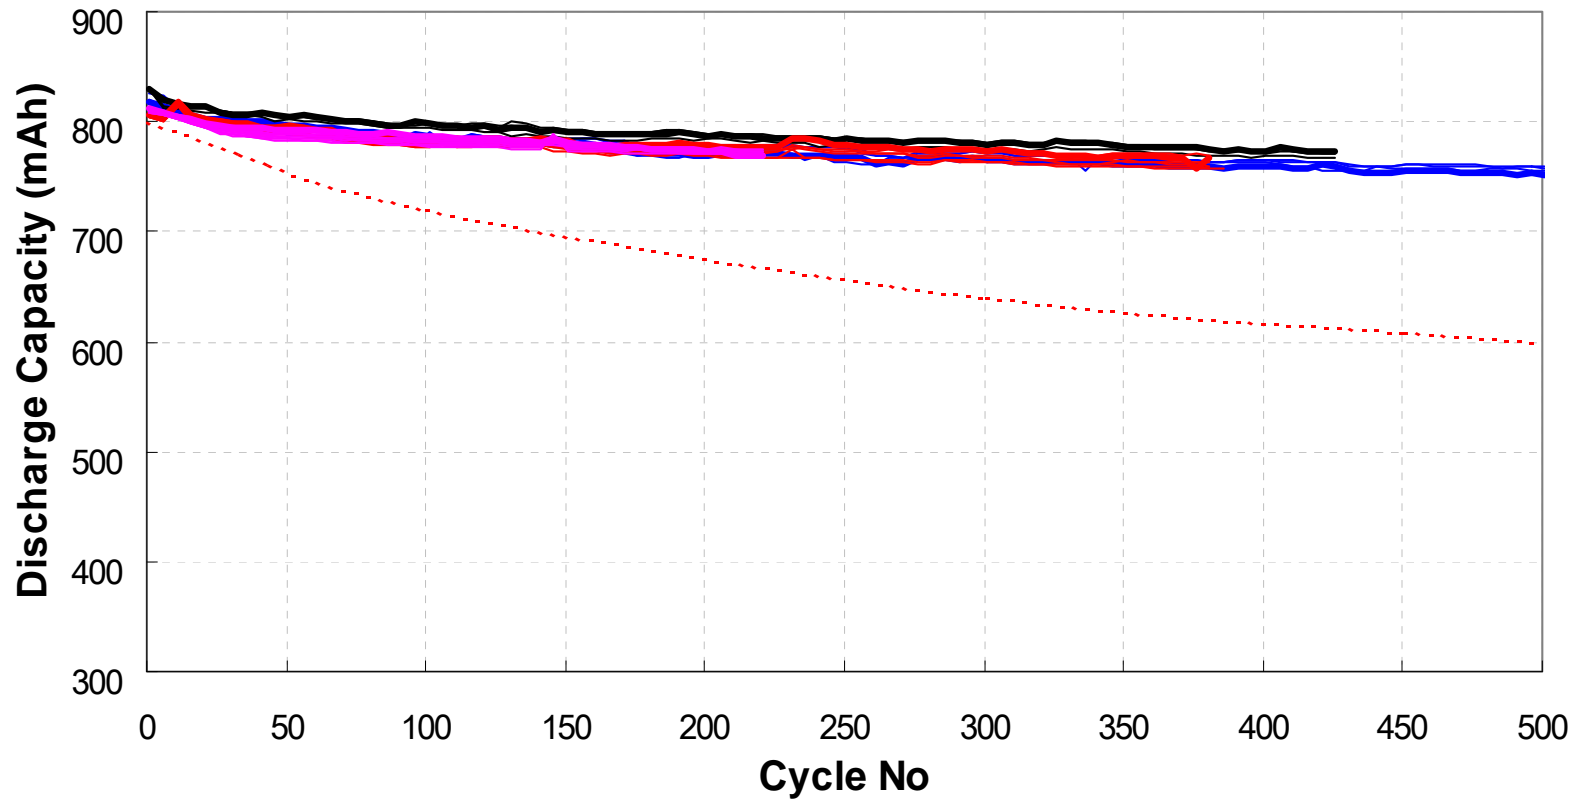

Confidential