



Li-ion Rechargeable


BATTERY

*The heart of next-generation
mobile devices*

Discharge Rate Characteristics



ICP803450R 1CmA=1300mA
 Charge : CC-CV 0.5C-4.2V 0.1C or 2.5h cut-off at 25°C
 Discharge : CC 0.2C/0.5C/1.0C/2.0C 3V cut-off at 25°C

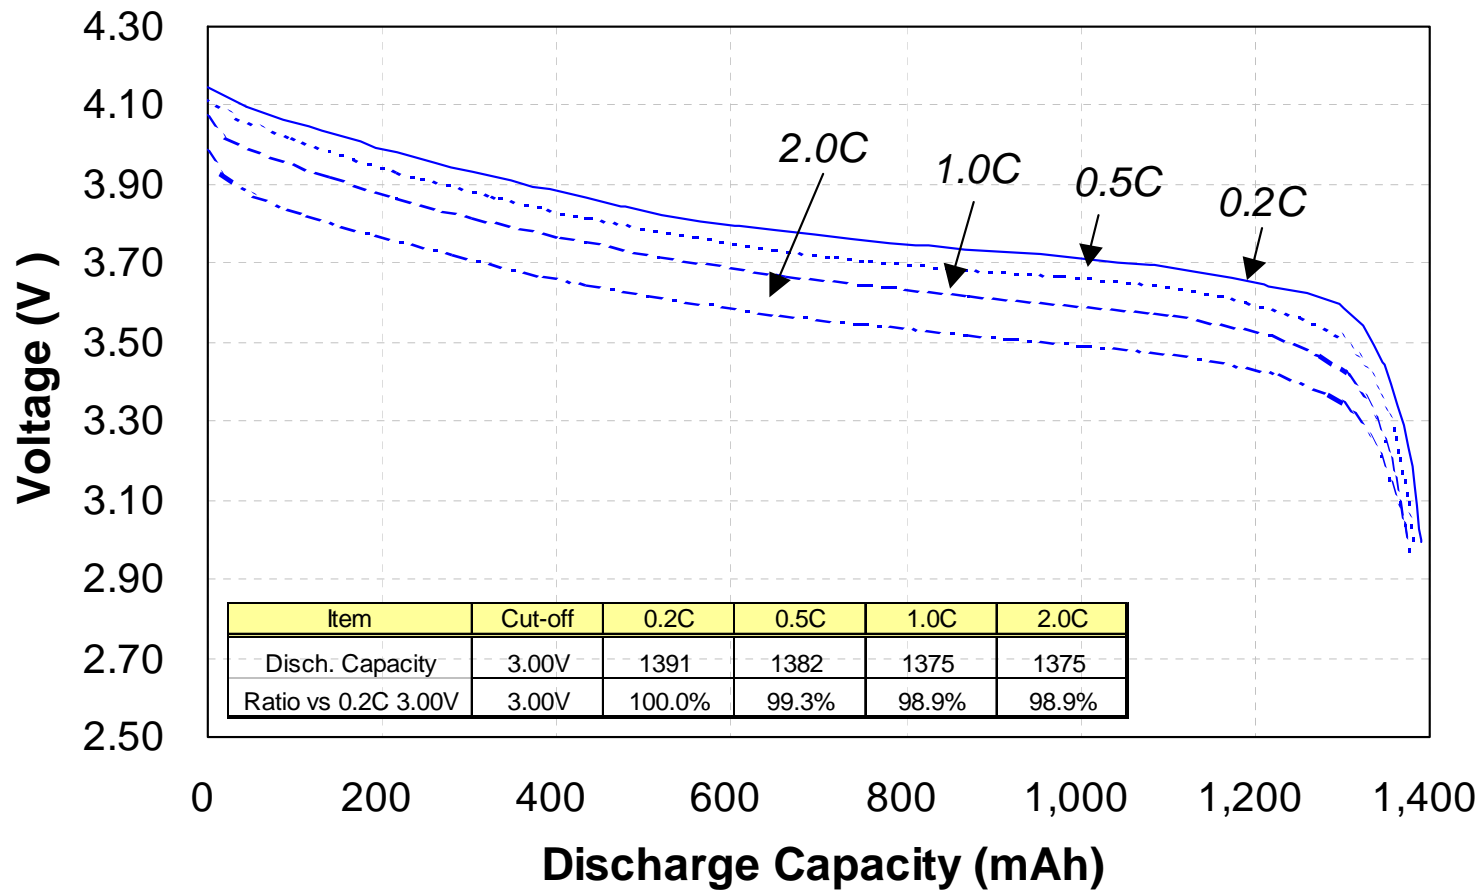


Discharge Temperature Characteristics (I)



ICP803450R 1CmA=1300mA

Charge : CC-CV 0.5C-4.2V 0.1C or 2.5hr cut-off at 25°C

Discharge : CC 0.5C 3V cut-off at -20°C/-10°C/0°C/25°C/40°C/60°C (after 4h standing)

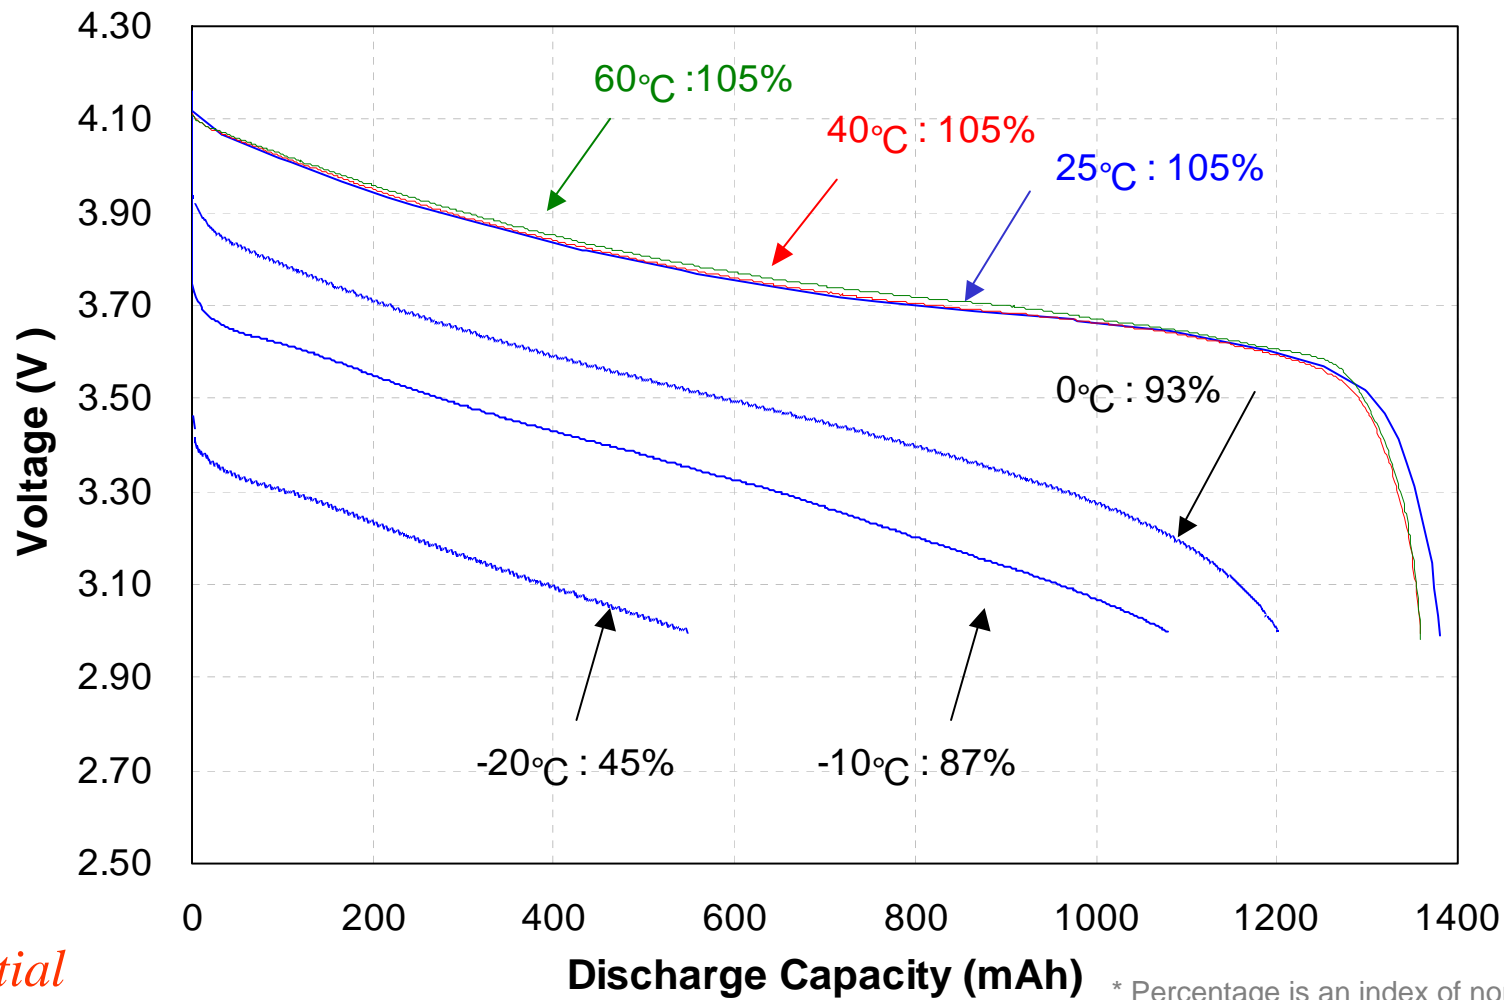

Confidential

* Percentage is an index of nominal capacity (1300mAh).


Cycle Life : Capacity Retention



ICP803450R 1CmA=1300mA

Charge : CC-CV 1.0C-4.2V 130mA or 2.5h cut-off at 25°C

Discharge : CC 1.0C 3.0V cut-off at 25°C

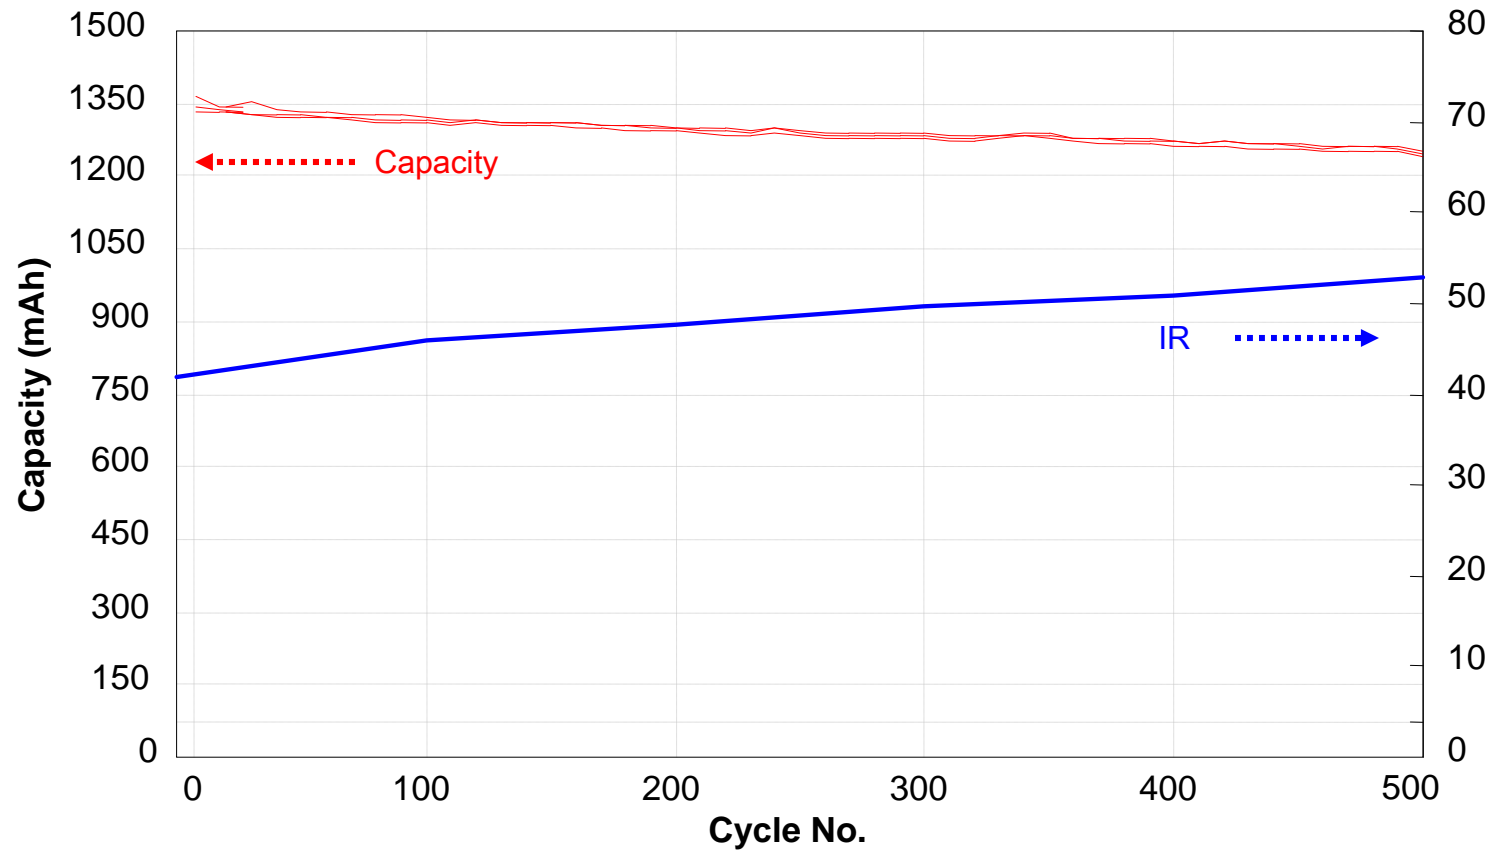

Confidential