

ENERGIZER L522


9V



Foil Pouch



Industry Standard Dimensions

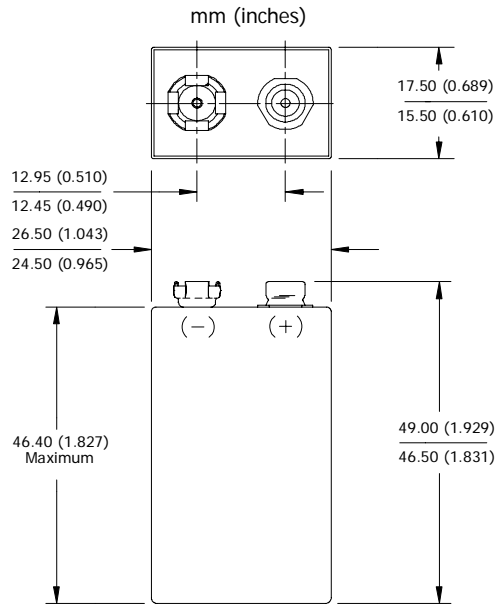



This Battery has Underwriters Laboratories component Recognition

Specifications



- Classification:** Lithium 9V
- Chemical System:** Lithium-Manganese Dioxide (Li/MnO₂)
- Designation:** ANSI-1604LC
- Nominal Voltage:** 9.0 volts
- Operating Temp:** -40°C to 60°C (-40°F to 140°F)
- Storage Temp:** -40°C to 60°C (-40°F to 140°F)
- Max Discharge :** 120 mA continuous *
- Typical Weight:** 34.4 grams (1.2 oz.)
- Typical Volume:** 21.4 cubic centimeters (1.3 cubic inch)
- Jacket:** Plastic (shipped in foil pouch)
- Terminal:** Miniature Snap
- Typical Li Content:** 1.35 grams (0.048 oz.)
- UL Listed:** MH12454
- Applications:** This battery best suited for short term applications. **
- Shipping:** For complete details, please reference:
 Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations
 United States: 49 CFR 173.185

- * **Discharging above 120 milliamps (mA) may activate the built-in safety mechanism. This can permanently affect battery performance.**
- ** **The battery should remain in the foil pouch until it is put into use. For long term applications, the L522MJ metal jacket version is recommended.**

Typical Discharge Performance (21°C)

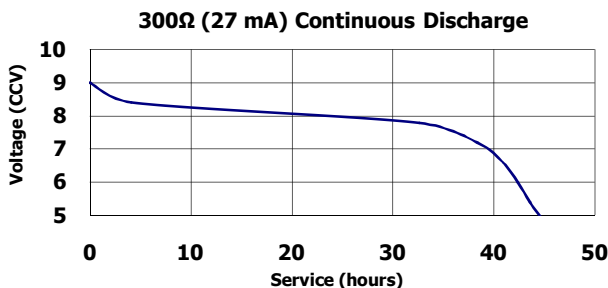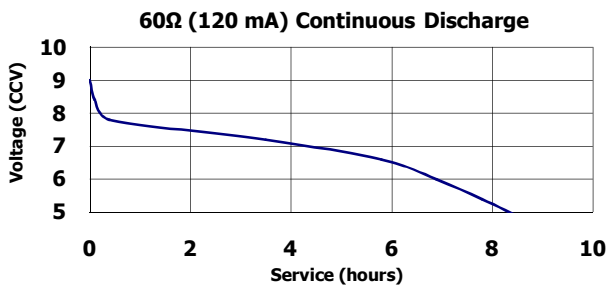

Milliamp-Hours Performance (21°C)

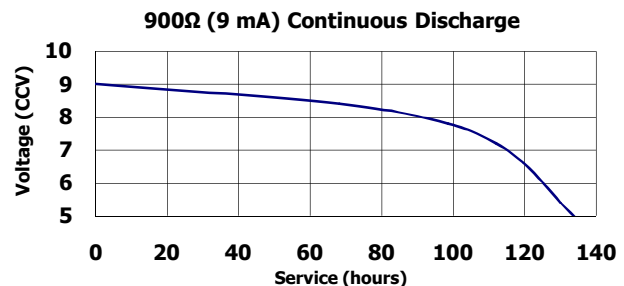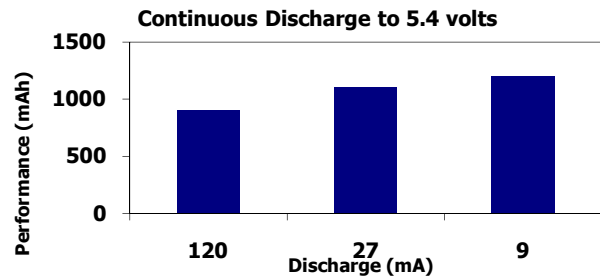

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.