

Primary lithium batteries

LS 14500W

3.6V Primary lithium-thionyl chloride (Li-SOCl₂)
AA-size bobbin cell

For applications requesting superior voltage response and operating life in widely fluctuating temperature environments up to +95°C.



Key features

- High and stable operating voltage
- Superior voltage readings after exposure at elevated temperature
- Voltage readings during pulsing moderately affected by T fluctuations
- Less than 1.5% of self-discharge after storage 1 year at +20°C
- Stainless steel container (low magnetic signature)
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Underwriters Laboratories (UL) component recognition
- Compliant with EN 50020 "Atex" standard
- Non-restricted for transport

Main applications

- Electronic toll collection
- Identification and tracking systems
- Professional electronic

etc...

Cell size references

UM3 - R6 - AA

Electrical characteristics


(typical values for cells stored for one year or less)

Nominal capacity <i>(at 1 mA +20°C 2V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).</i>	2.2 Ah
Open circuit voltage (at +20°C)	3.67 V
Nominal voltage (at 0.2 mA +20°C)	3.6 V
<i>Pulse capability: Varies according to pulse characteristics, temperature, cell history and the application's acceptable minimum voltage. Fitting the cell with a capacitor in parallel may be recommended in severe conditions. Consult Saft.</i>	
Continuous current permitting 50% of the nominal capacity to be restored at +20°C with 2V cut off <i>(Higher currents are possible. Consult Saft)</i>	60 mA
Storage <i>(recommended)</i> <i>(for more severe conditions, consult Saft)</i>	+30°C (+86°F) max
Operating temperature range <i>(Operation above ambient may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult Saft)</i>	-60°C/+95°C [-76°F/+203°F]


Physical characteristics

Diameter (max)	14.65 mm (0.58 in)
Height (max)	50.3 mm (1.98 in)
Typical weight	16.2 g (0.5 oz)
Li metal content	approx. 0.6 g
Available termination suffix	
CN, CNR	radial tabs
2PF, 3PF, 3PF RP, 4PF	radial pins
CNA (AX)	axial leads
FL	flying leads etc.


LS 14500W

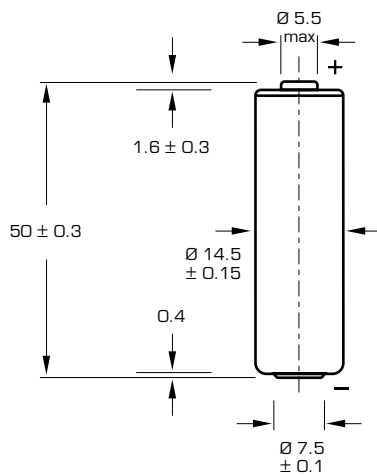

Dimensions in mm.

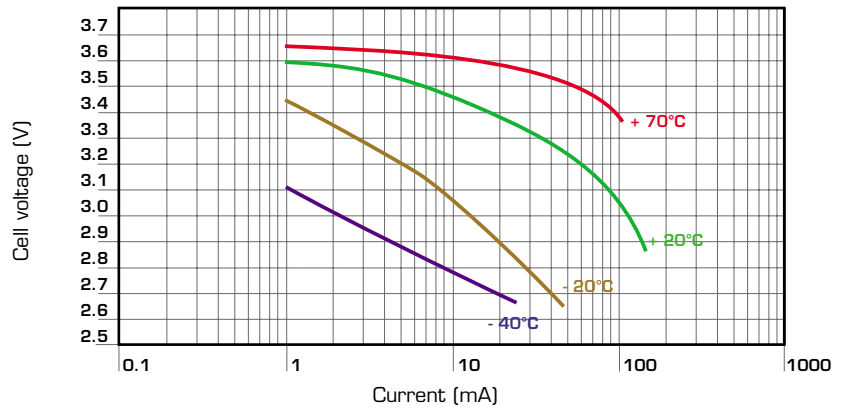

Voltage plateau versus Current and Temperature (at mid-discharge)

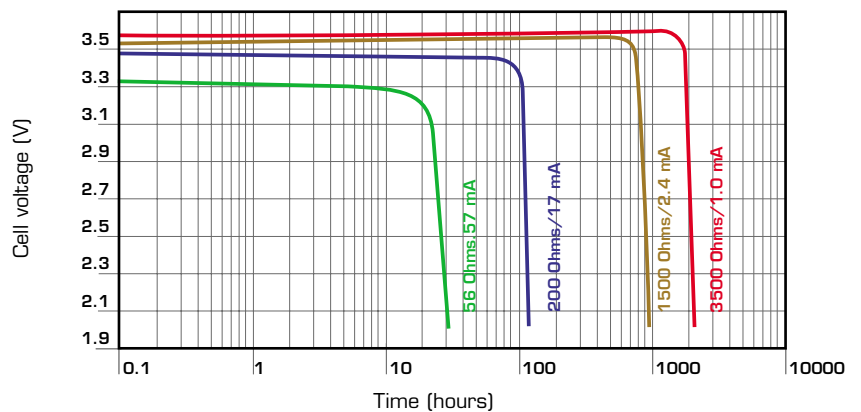


Typical discharge profiles at +20°C

Storage

- The storage area should preferably be clean, cool (not exceeding +30°C), dry and ventilated.

Warning

- Fire, explosion and severe burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C (212°F), incinerate, or expose contents to water.
- Do not solder directly to the cell.

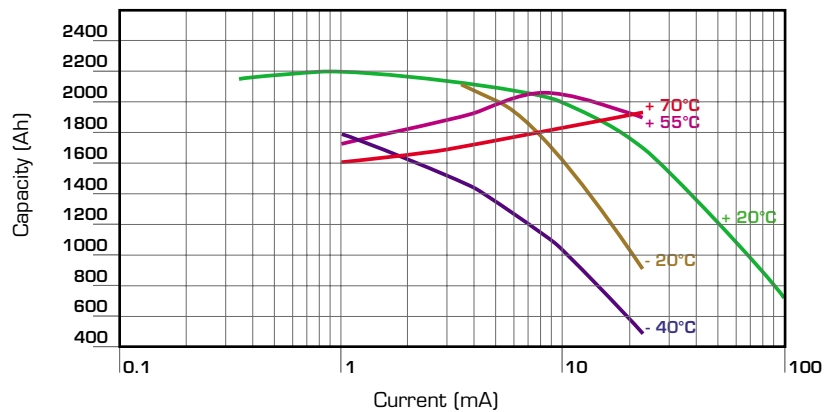

Restored Capacity versus Current and Temperature (2.0 V cut off)

Saft

12, rue Sadi Carnot
93170 Bagnolet - France
Tel +33 1 49 93 19 18
Fax +33 1 49 93 19 69

www.saftbatteries.com

Doc. N° 31055-2-0305
Published by the Communications Department

Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft. For more details on primary lithium technologies please refer to Primary Lithium Batteries Selector Guide Doc N° 31048-2. Photo credit: Saft. Produced by Arthur Associates

Société anonyme au capital de 31 944 000 €
RCS Bobigny B 383 703 873

