




Discharge Rate Characteristics(1)



Model: PGF383562D (1.0CmA = 850mA)
Charge: CC-CV 0.5C, 4.2V, 85mA cut-off at 25°C
Discharge: CC 0.2/0.5/1.0/2.0/3.0C, 3.0V cut-off at 25°C

n=5	Discharge Capacity(mAh)				
	0.2C	0.5C	1.0C	2.0C	3.0C
Avg	879	869	856	834	801
Max	891	881	867	844	818
Min	873	863	850	829	791

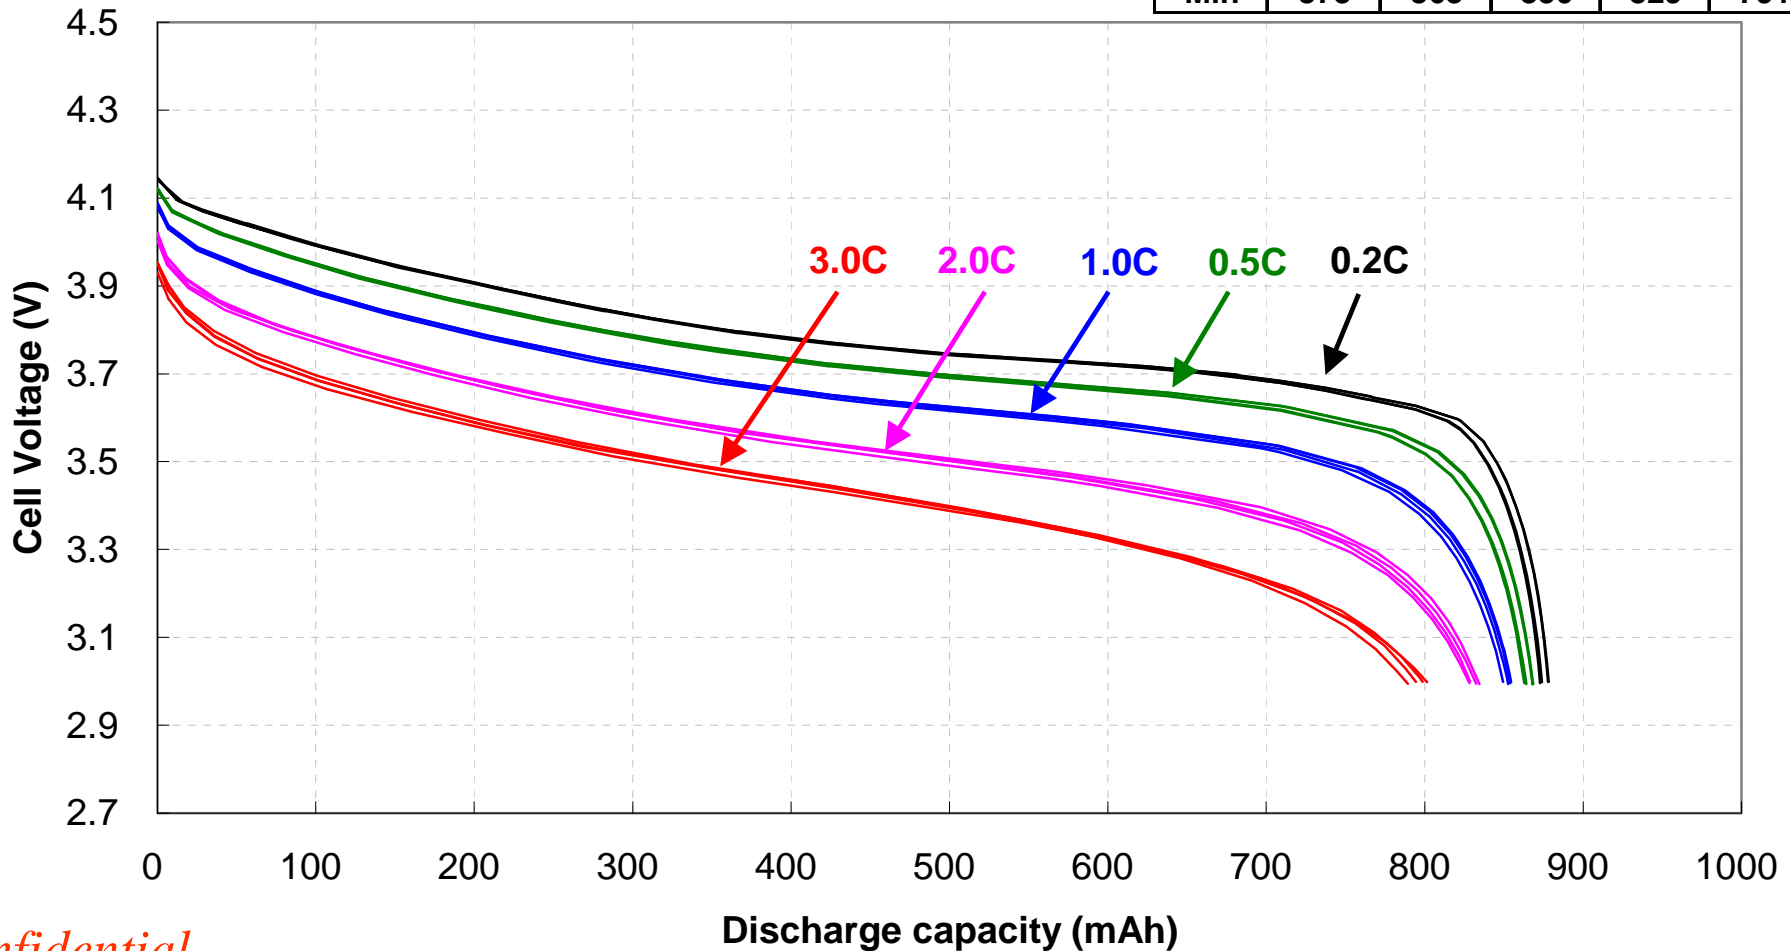


Confidential

Discharge Temperature Characteristics (1)



Model: PGF383562D(1.0CmA = 850mA)
Charge: CC-CV 0.5C, 4.2V, 85mA cut-off at 25°C
Discharge: CC 0.5C, 3.0V cut-off at -20/-10/0/25/40/60°C

n=5

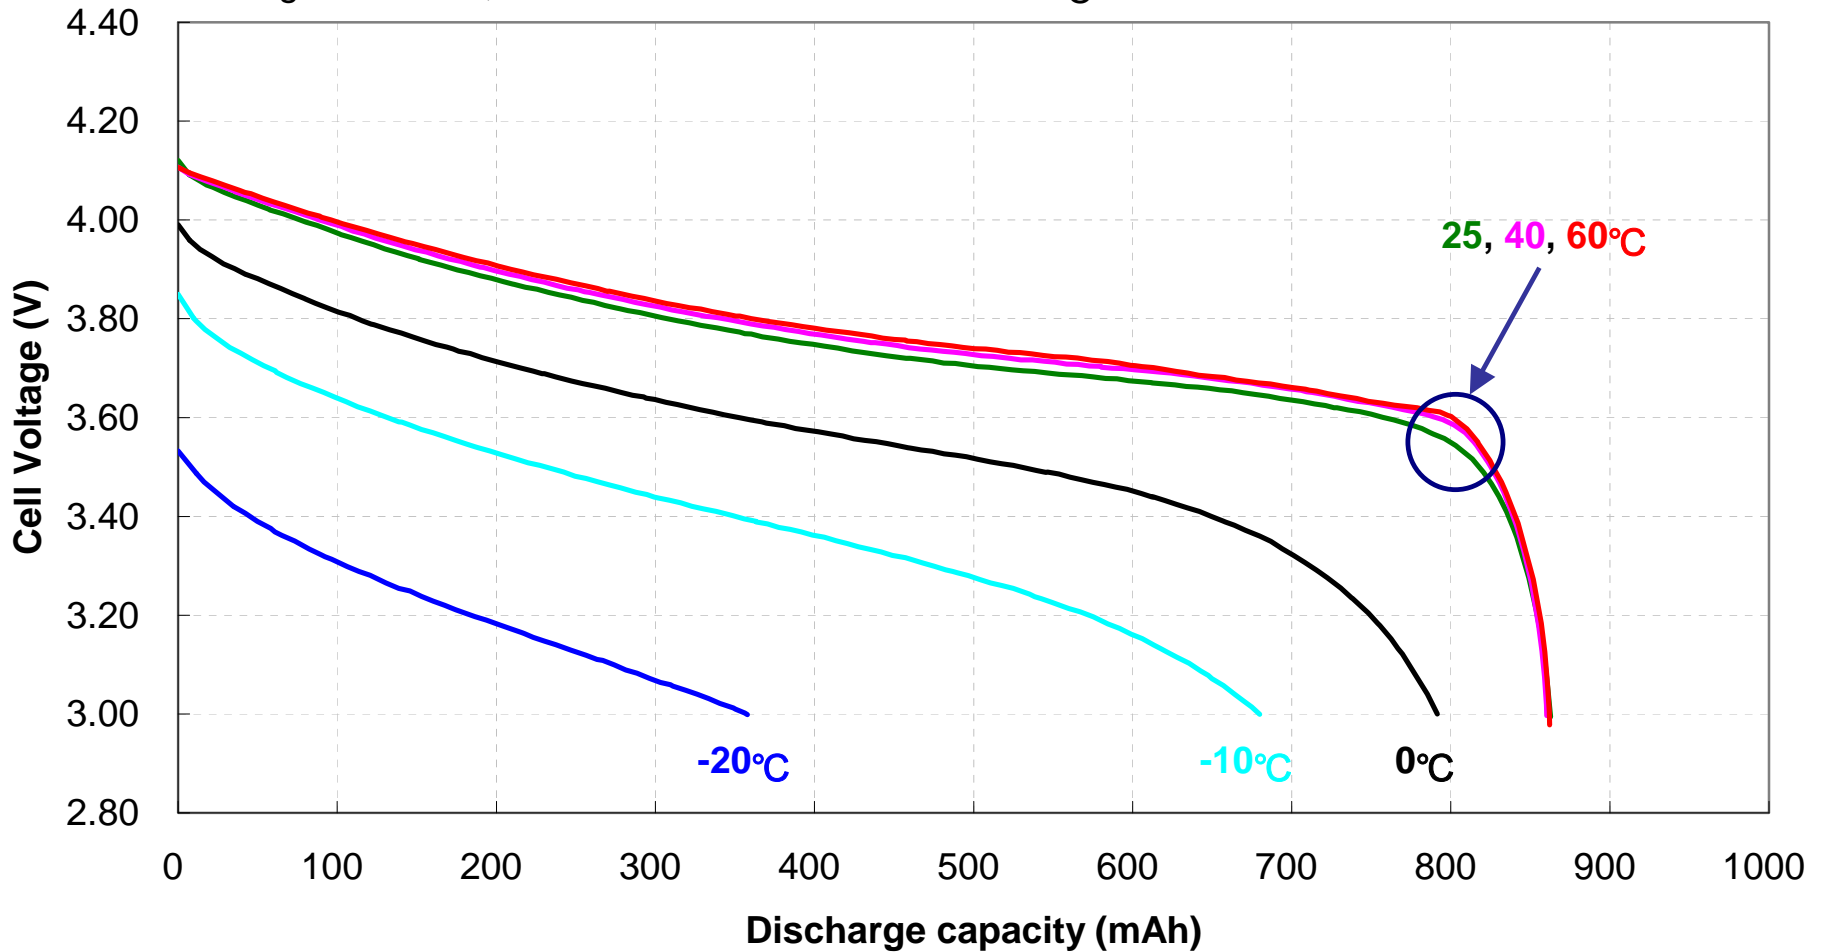


Confidential

Cycle Life : Capacity Retention



Model: PGF383562D (1.0CmA = 850mA)
Charge: CC-CV 1.0C, 4.2V, 85mA cut-off at 25°C
Discharge: CC 1.0C, 3.0V cut-off at 25°C

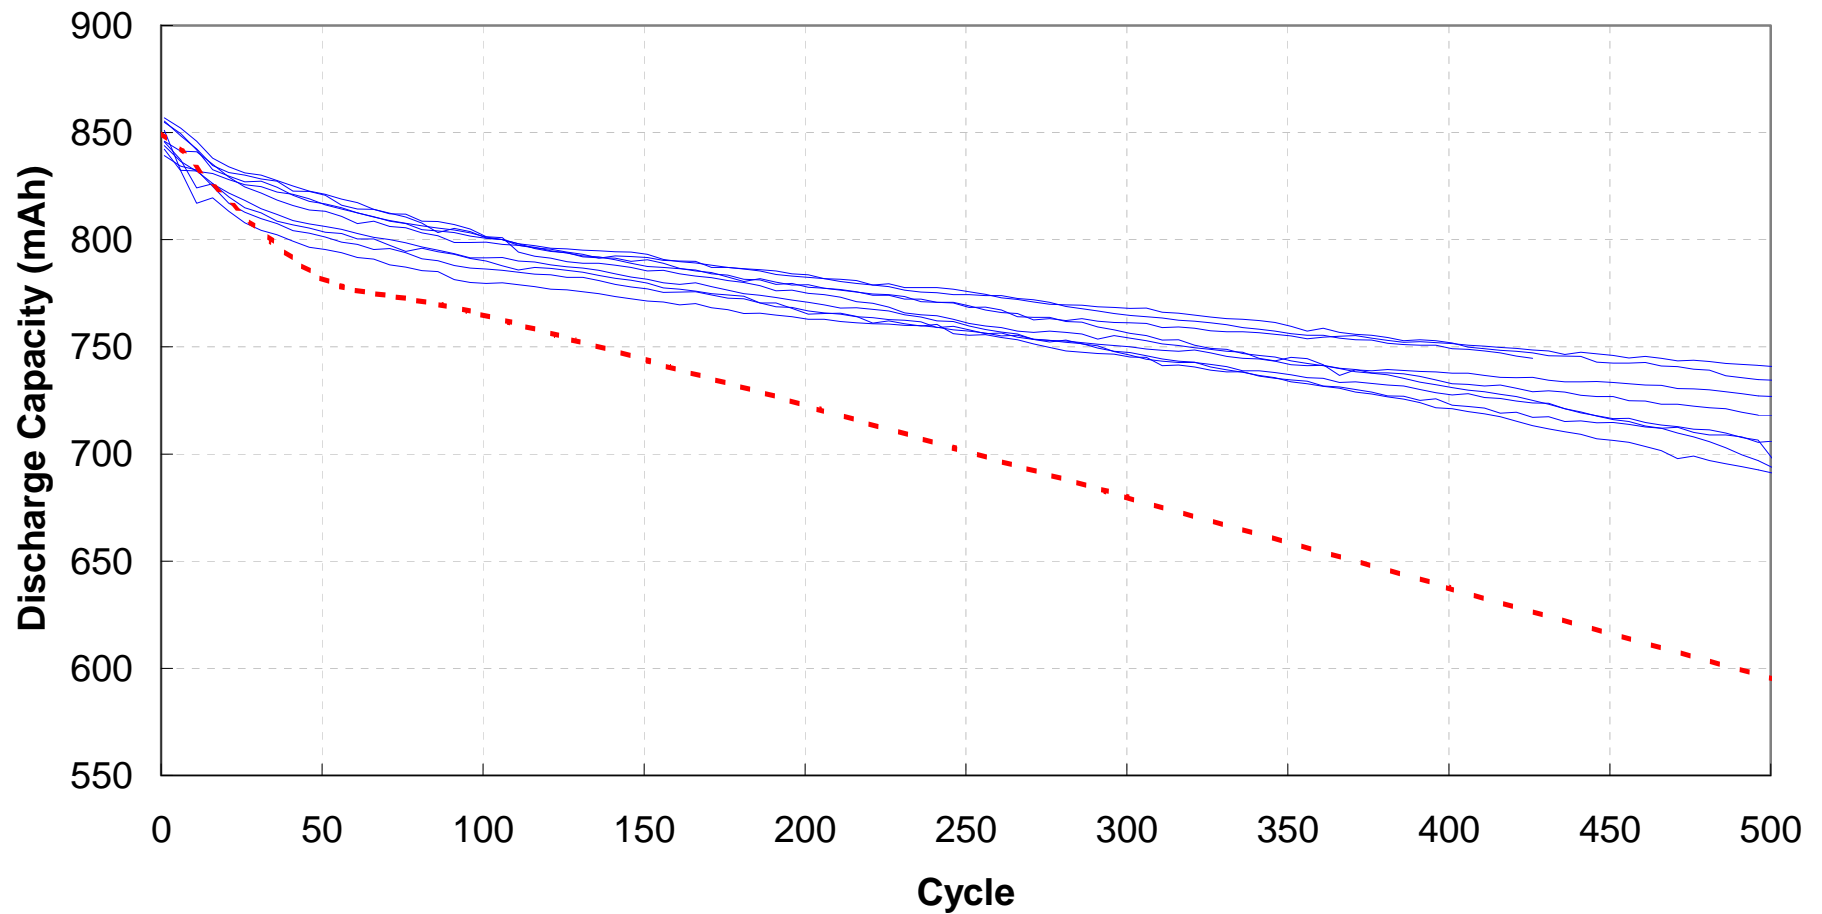

Confidential