




Discharge Rate Characteristics



Model: PGF553852A (1.0CmA = 1100mA)
Charge: CC-CV 0.5C, 4.2V, 110mA cut-off at 25°C
Discharge: CC 0.2/0.5/1.0/2.0/3.0C, 3.0V cut-off at 25°C

n=5	Discharge Capacity(mAh)				
	0.2C	0.5C	1.0C	2.0C	3.0C
Avg	1131	1124	1114	1097	1085
Max	1138	1131	1119	1102	1090
Min	1127	1120	1110	1092	1081

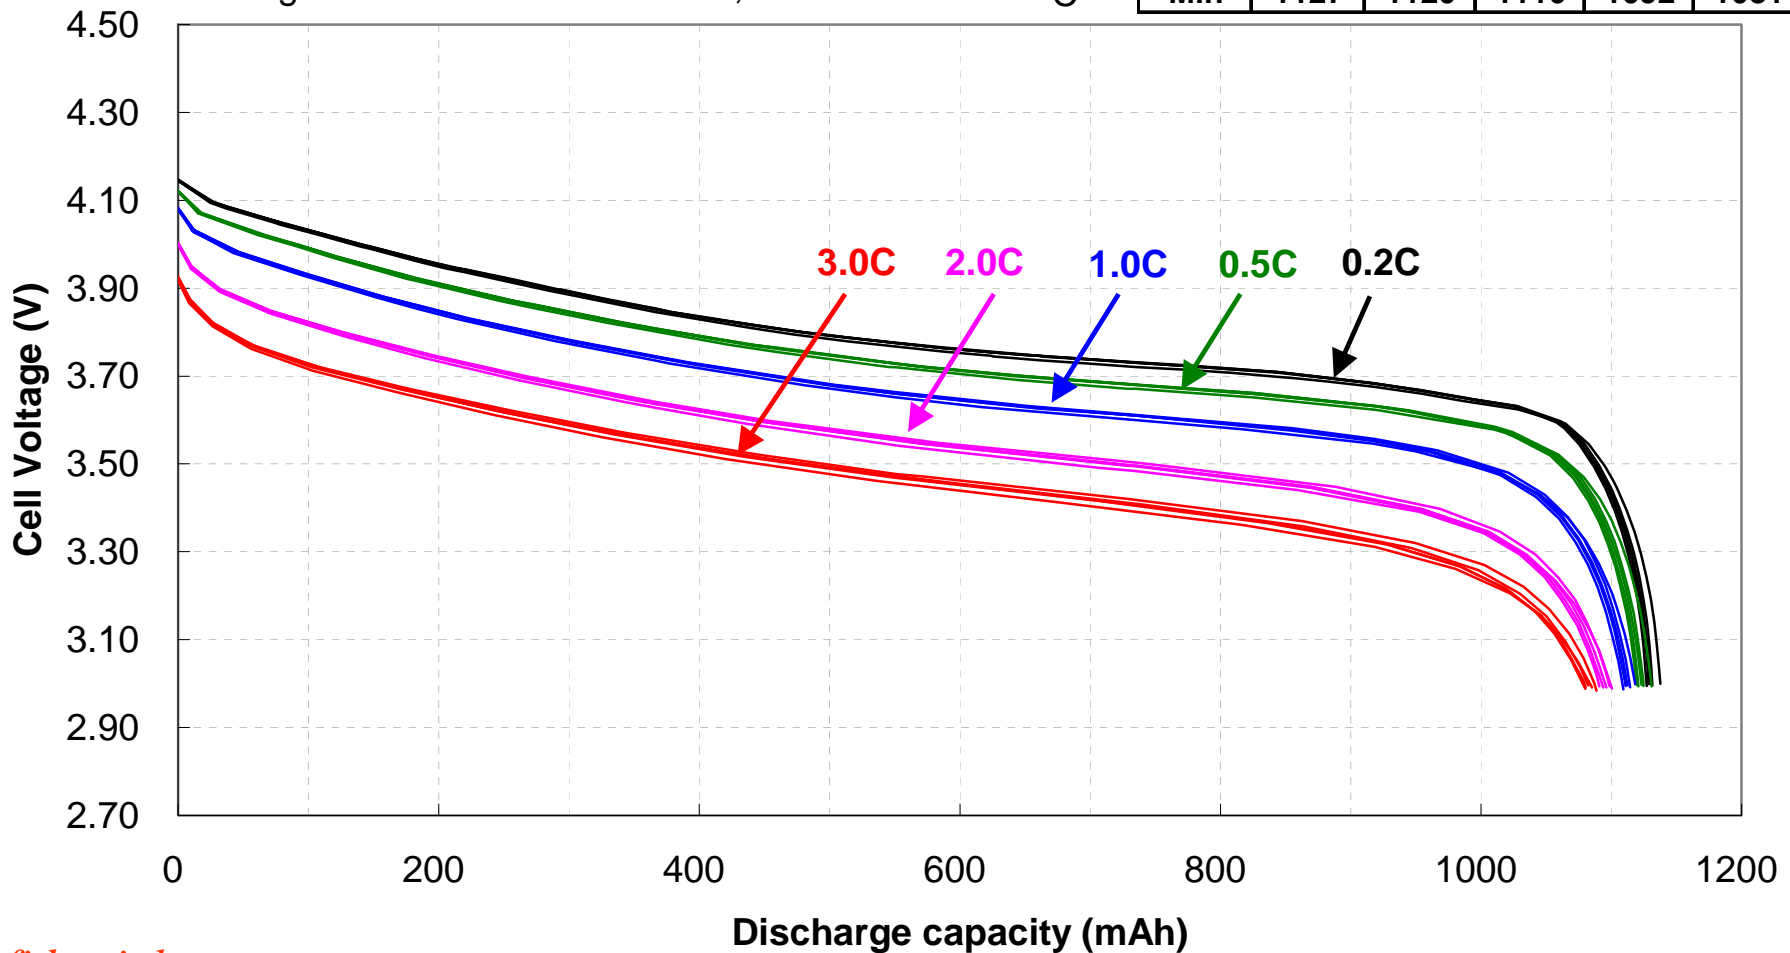


Discharge Temperature Characteristics



Model: PGF553852A (1.0CmA = 1100mA)
Charge: CC-CV 0.5C, 4.2V, 110mA cut-off at 25°C
Discharge: CC 0.5C, 3.0V cut-off at -20/-10/0/25/40/60°C

n=5

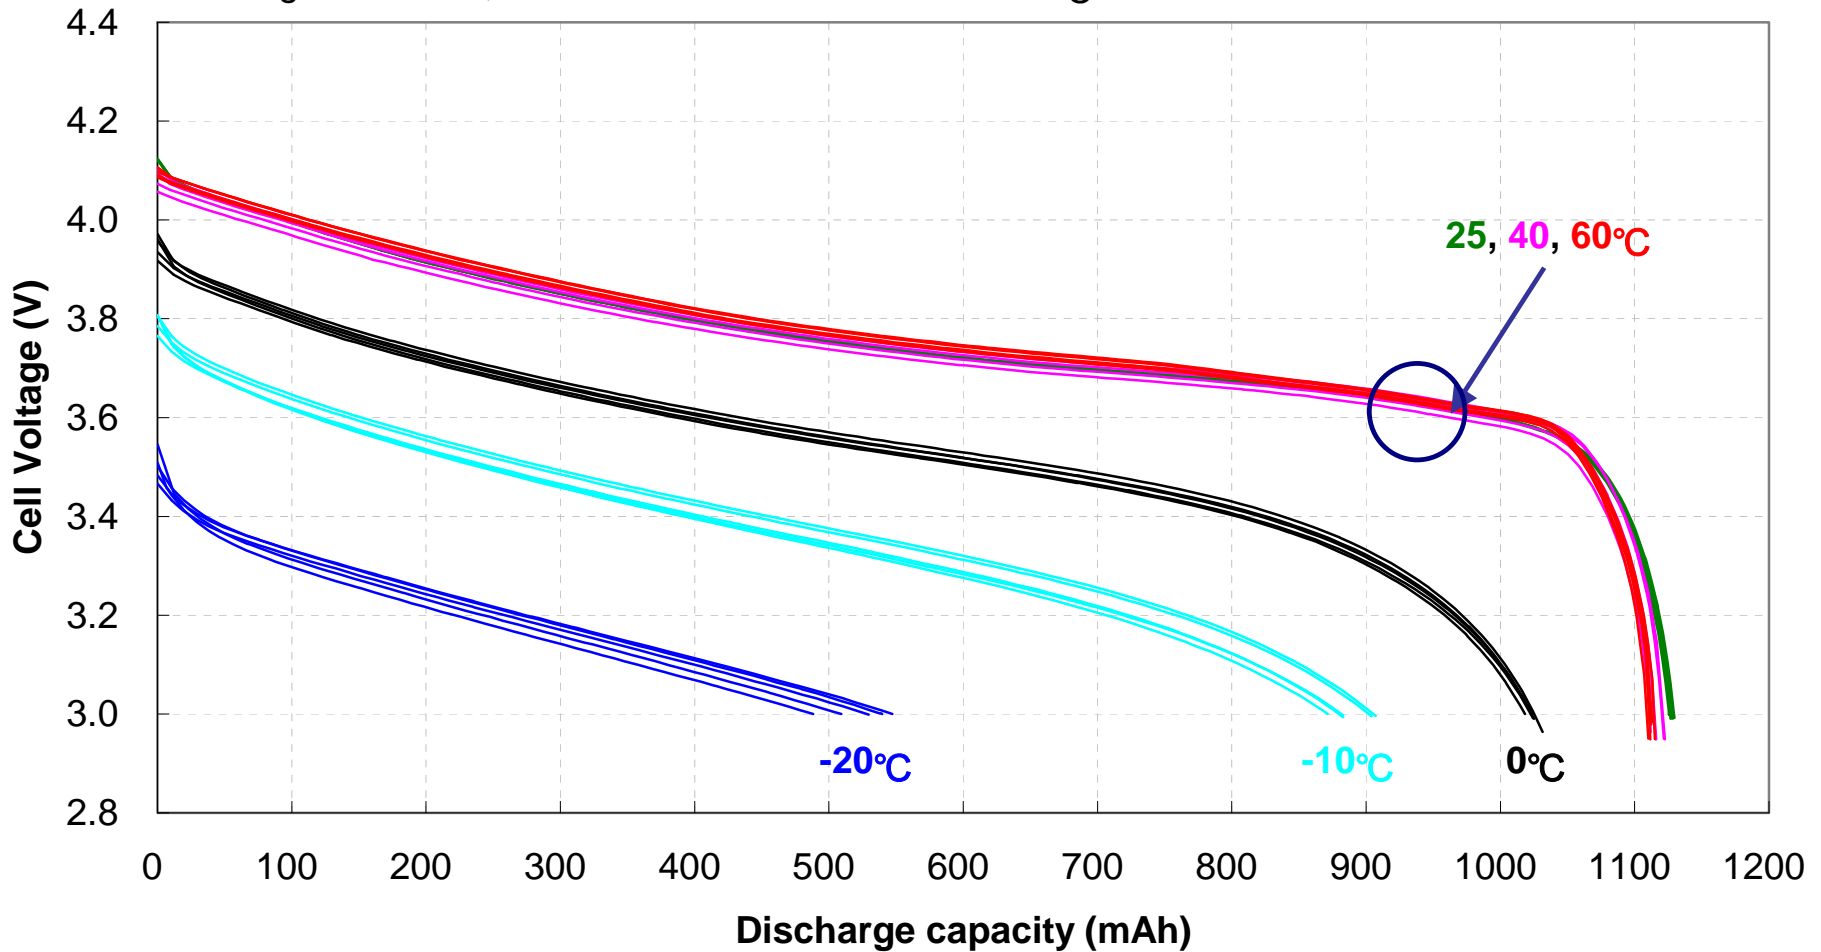

Cycle Life : Capacity Retention



Model: PGF553852A (1.0CmA = 1130mA)
Charge: CC-CV 1.0C, 4.2V, 113mA cut-off at 25°C
Discharge: CC 1.0C, 3.0V cut-off at 25°C

