


Rechargeable Sealed Lead-Acid Battery

PS-1227

12 Volt 2.9 Amp. Hrs.

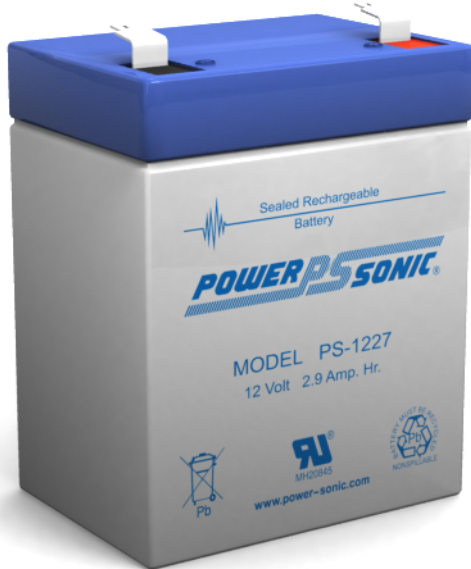

Features:

- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill proof construction allows safe operation in any position.
- Power/volume ratio yielding unrivaled energy density.
- Rugged ABS plastic case and cover
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




PERFORMANCE SPECIFICATIONS


Nominal Voltage	12 volts (6 cells in series)
Nominal Capacity	
20 hour rate (145mA to 10.50 volts)	2.90 A.H.
10 hour rate (260mA to 10.50 volts)	2.60 A.H.
5 hour rate (490mA to 10.20 volts)	2.45 A.H.
1 hour rate (1800mA to 09.00 volts)	1.80 A.H.
15 min rate (5680mA to 09.00 volts)	1.42 A.H.
Approximate Weight	2.43 pounds (1.10 kg)
Energy Density (20 hour rate)	1.30 Watt-hours/cubic inch (79.5 Watt-hours/l)
Specific Energy (20 hour rate)	14.3 Watt-hours/pound (31.64 Watt-hours/kg)
Internal Resistance (Fully Charged Battery)	45 milliohms (approximately)
Maximum Discharge Current (≤ 7 Min.)	8.7 amperes
Maximum Short-Duration Discharge Current (≤ 10 Sec.)	29 amperes
Terminals	"F1":: Quick disconnect tabs, 0.187" x 0.032"- Mate with AMP. INC. FASTON "187" series
Shelf Life — % of nominal capacity at 68° F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Case	ABS Plastic

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website.


Shelf Life and Storage

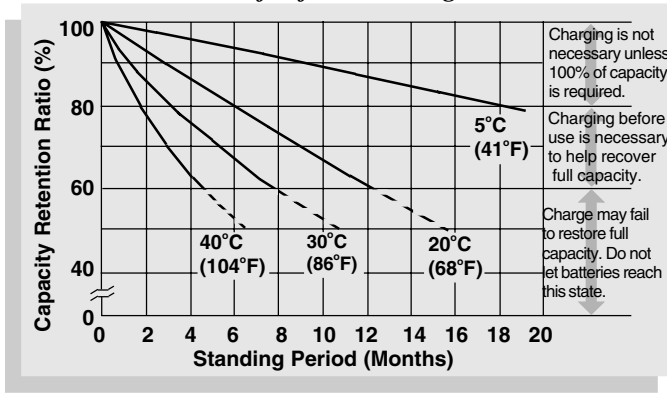


Discharge Characteristics

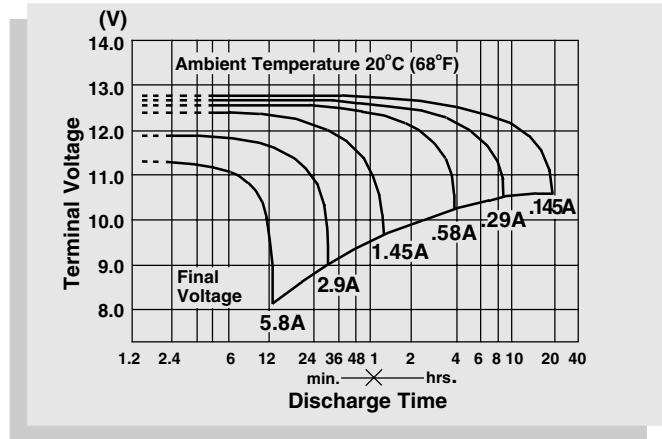


Life Characteristics in Stand-By Use

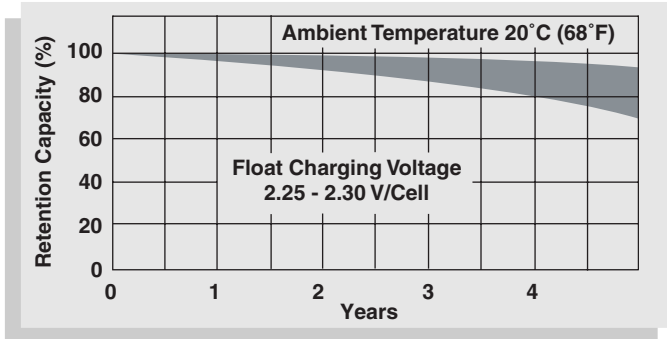

Discharge Time vs. Discharge Current

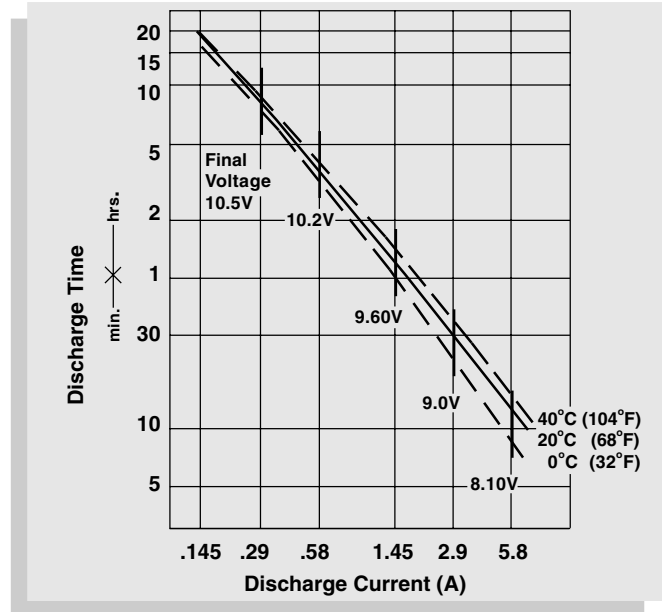


Life Characteristics in Cyclic Use

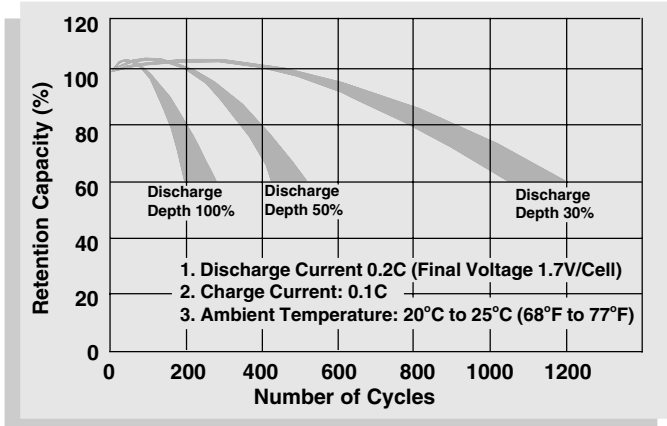

Physical Dimensions: in. (mm)

Terminals:

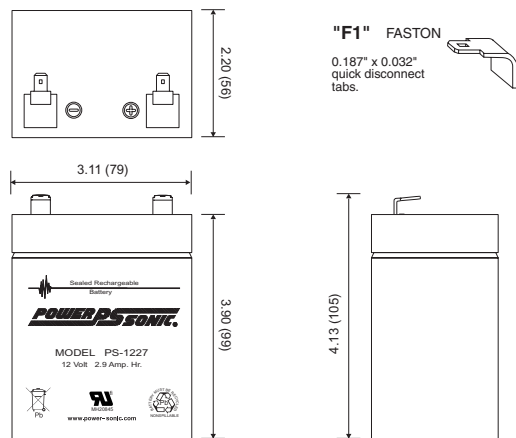

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

CHARGING

Cycle Applications: Limit initial current to 967mA. Charge until battery voltage (under charge) reaches 14.40 to 14.70 volts at 68°F (20°C). Hold at 14.40 to 14.70 volts until current drops to approximately 29mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.50 to 13.80 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.



CORPORATE OFFICE
 7550 Panasonic Way
 San Diego, CA 92154 USA
 Tel: +1-619-661-2020
 Fax: +1-619-661-3650
national-sales@power-sonic.com

CUSTOMER SERVICE
 Tel: +1-619-661-2030
 Fax: +1-619-661-3648
customer-service@power-sonic.com

SALES/INTERNATIONAL
 Tel: +1-650-364-5001
 Fax: +1-650-366-3662
battery@power-sonic.com

www.power-sonic.com