

Rechargeable Sealed Lead-Acid Battery

**PS-650L
6 Volt 5.0 Amp. Hrs.**



Features:

- Absorbent Glass Mat (AGM) technology for superior performance.
- Automatically resetting circuit breaker to protect against short circuits (thermal fuse).
- Power/volume ratio yielding unrivaled energy density.
- Rugged ABS plastic case and cover
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




PERFORMANCE SPECIFICATIONS


Nominal Voltage	6 volts (3 cells in series)
Nominal Capacity	
20 hour rate (250mA to 5.25 volts).....	5.0 A.H.
10 hour rate (430mA to 5.25 volts).....	4.3 A.H.
5 hour rate (800mA to 5.10 volts).....	4.0 A.H.
1 hour rate (3.0A to 4.50 volts).....	3.0 A.H.
Approximate Weight	2.0 pounds (0.9 kg)
Energy Density (20 hour rate)	1.15 Watt-hours/cubic inch (69.6 Watt-hours/l)
Specific Energy (20 hour rate)	15.0 Watt-hours/pound (33.0 Watt-hours/kg)
Maximum Discharge Current (5 Min.)	7.5 amperes
Terminals	Fully collapsible spring type terminals
	"F1": Quick disconnect tabs, 0.187" x 0.032" - Mate with AMP. INC. FASTON "187" series
Shelf Life — % of nominal capacity at 68°F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge	-4° F (-20°C) to 122°F (50°C)
Discharge	-4° F (-20°C) to 140°F (60°C)
Case	ABS Plastic

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website.


Shelf Life and Storage

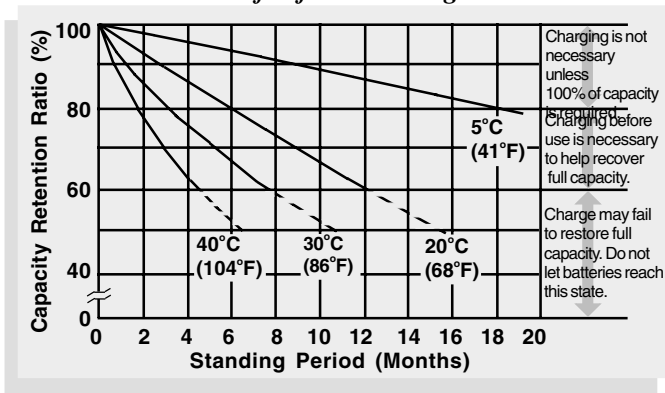


Discharge Characteristics

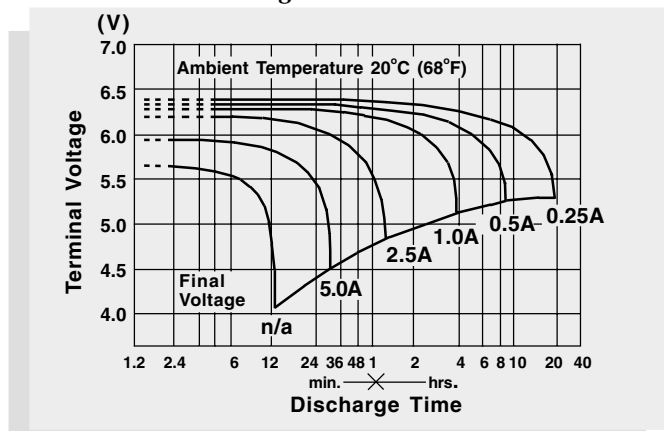


Life Characteristics in Stand-By Use

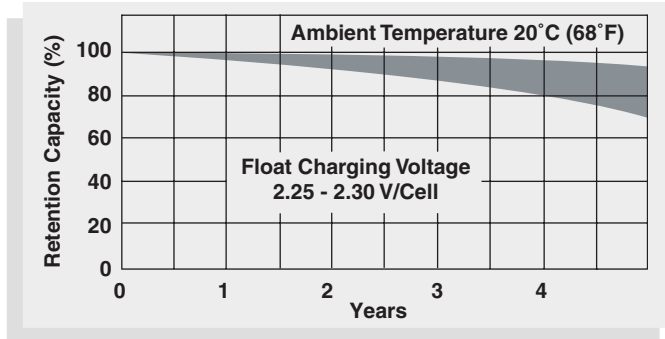


Discharge Time vs. Discharge Current

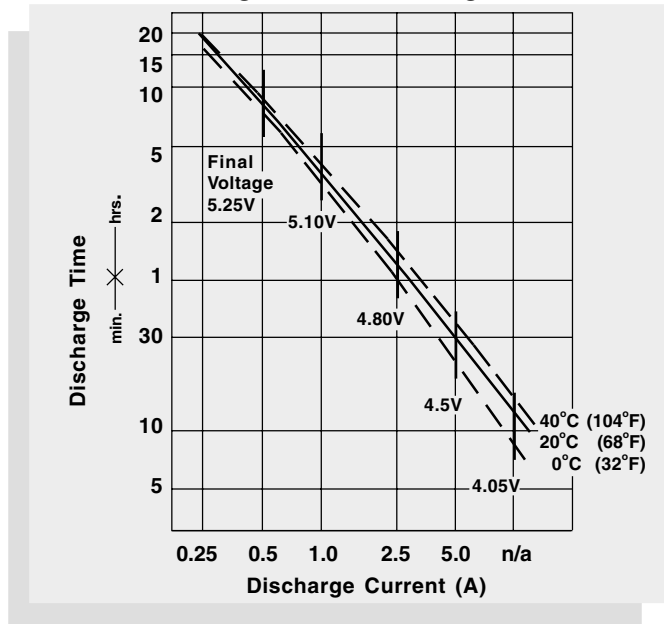


Life Characteristics in Cyclic Use

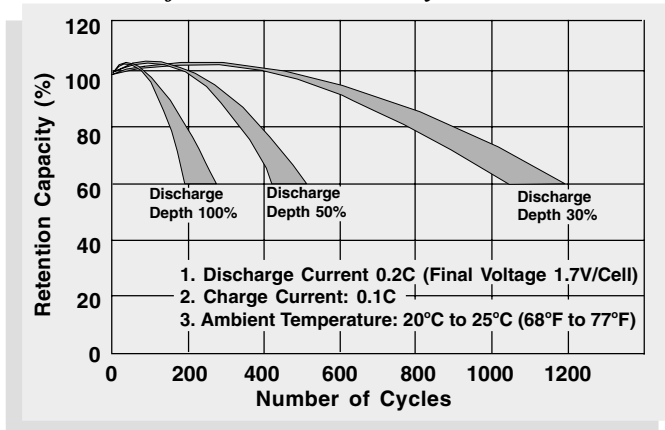

Physical Dimensions

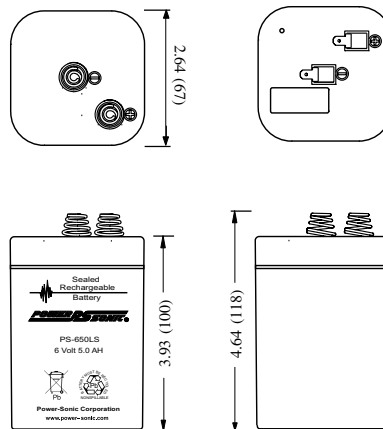

Terminals: (mm)

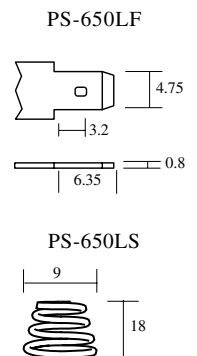

CHARGING

Cycle Applications: Limit initial current to 1.35mA. Charge until battery voltage (under charge) reaches 7.20 to 7.35 volts at 68°F (20°C). Hold at 7.20 to 7.35 volts until current drops to approximately 50mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 6.75 to 6.90 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.



CORPORATE OFFICE
 7550 Panasonic Way
 San Diego, CA 92154 USA
 Tel: +1-619-661-2020
 Fax: +1-619-661-3650
 national-sales@power-sonic.com

CUSTOMER SERVICE
 Tel: +1-619-661-2030
 Fax: +1-619-661-3648
 customer-service@power-sonic.com

SALES / INTERNATIONAL
 Tel: +1-650-364-5001
 Fax: +1-650-366-3662
 battery@power-sonic.com

www.power-sonic.com