



POWER SONIC

**RECHARGEABLE SEALED LEAD-ACID BATTERY
HIGH-RATE SERIES**

PSH-655 FR

6 Volt 5.5 Amp. Hrs.



Features:

- Absorbent Glass Mat (AGM) technology for superior performance.
- Valve regulated, spill proof construction allows safe operation in any position.
- 21 Watts/cell for 15 min. of constant power
- Rugged plastic case and cover, flame retardant to UL94 V-0.
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified.
- U.L. recognized under file number MH 20845.




PERFORMANCE SPECIFICATIONS


Nominal Voltage	6 volts (3 cells in series)
Nominal Capacity	
20 hour rate (275mA to 5.25 volts).....	5.50 A.H.
10 hour rate (550mA to 5.25 volts).....	5.40 A.H.
5 hour rate (950mA to 5.10 volts).....	4.75 A.H.
1 hour rate (3.7A to 4.50 volts).....	3.70 A.H.
15 min rate (11.2A to 4.50 volts).....	2.80 A.H.
Approximate Weight	2.10 pounds (0.95 kg)
Energy Density (20 hour rate)	1.64 Watt-hours/cubic inch (100.3 Watt-hours/l)
Specific Energy (20 hour rate)	15.7 Watt-hours/pound (34.7 Watt-hours/kg)
Internal Resistance (Fully Charged Battery)	10 milliohms (approximately)
Maximum Discharge Current (≤ 7 Min.)	16.5 amperes
Maximum Short-Duration Discharge Current (≤ 10 Sec.)	55.0 amperes
Terminals	“F1”:: Quick disconnect tabs, 0.187" x 0.032"- Mate with AMP. INC. FASTON “187” series
Shelf Life — % of nominal capacity at 68° F (20° C)	
1 Month.....	97%
3 Months.....	91%
6 Months.....	83%
Operating Temperature Range	
Charge	-4°F (-20°C) to 122°F (50°C)
Discharge	-4°F (-20°C) to 140°F (60°C)
Case & Cover	ABS plastic (UL94 V-O flame retardant)

To ensure safe and efficient operation always refer to the latest edition of our Technical Manual, as published on our website.


Shelf Life and Storage

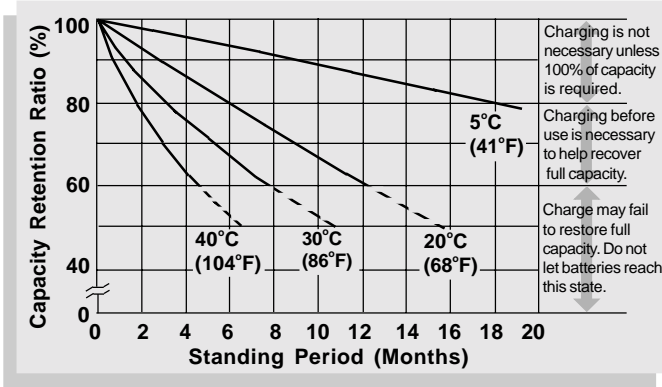


Discharge Characteristics

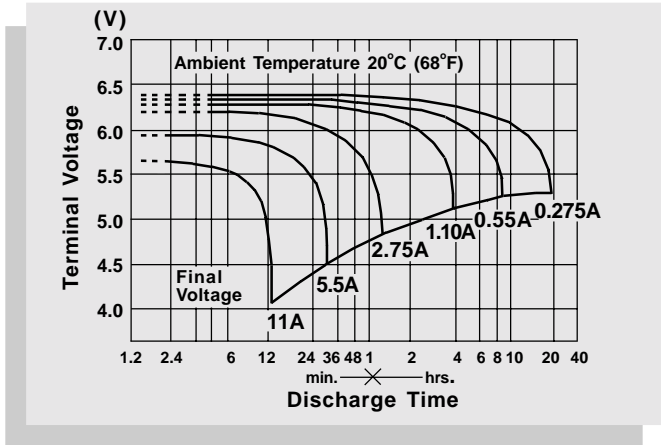


Life Characteristics in Stand-By Use

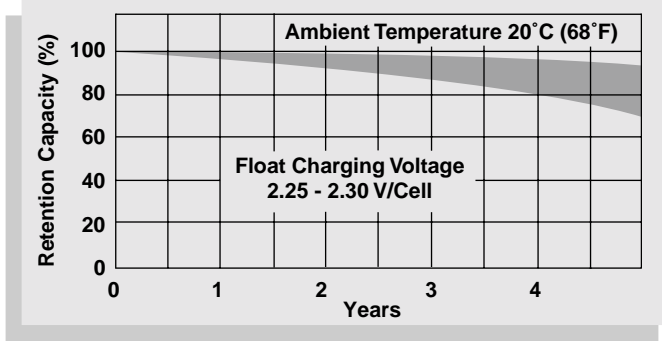

Discharge Time vs. Discharge Current

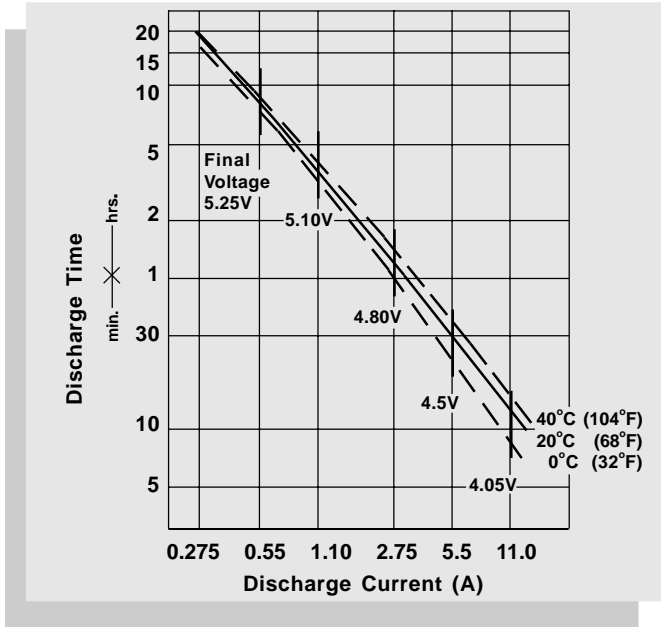

Life Characteristics in Cyclic Use

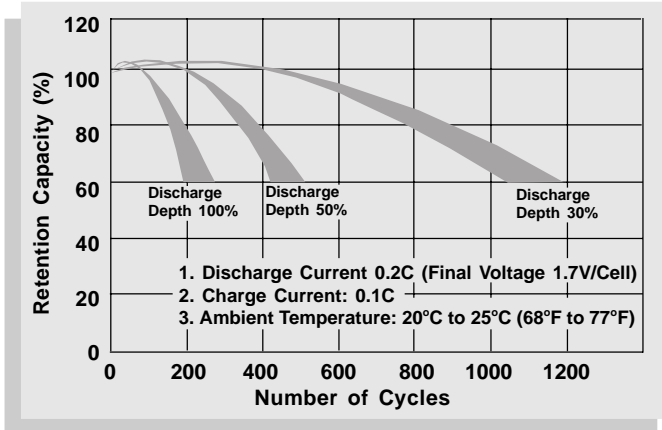


CHARGING

Cycle Applications: Limit initial current to 1.65A. Charge until battery voltage (under charge) reaches 7.20 to 7.35 volts at 68°F (20°C). Hold at 7.20 to 7.35 volts until current drops to approximately 55mA. Battery is fully charged under these conditions, and charger should either be disconnected or switched to "float" voltage.


"Float" or "Stand-By" Service: Hold battery across constant voltage source of 6.75 to 6.90 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

NOTE: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged after 6-9 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Physical Dimensions

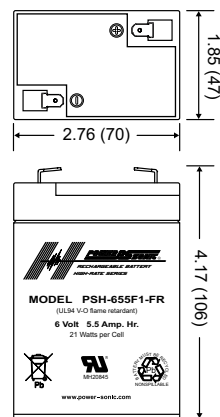

Terminals (F1)



Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.



CORPORATE OFFICE
7550 Panasonic Way
San Diego, CA 92154 USA
Tel: +1-619-661-2020
Fax: +1-619-661-3650
national-sales@power-sonic.com

CUSTOMER SERVICE
Tel: +1-619-661-2030
Fax: +1-619-661-3648
customer-service@power-sonic.com

SALES / INTERNATIONAL
Tel: +1-650-364-5001
Fax: +1-650-366-3662
battery@power-sonic.com

www.power-sonic.com