



## Li/MnO<sub>2</sub> Primary System U9VL 9V Size Battery\*

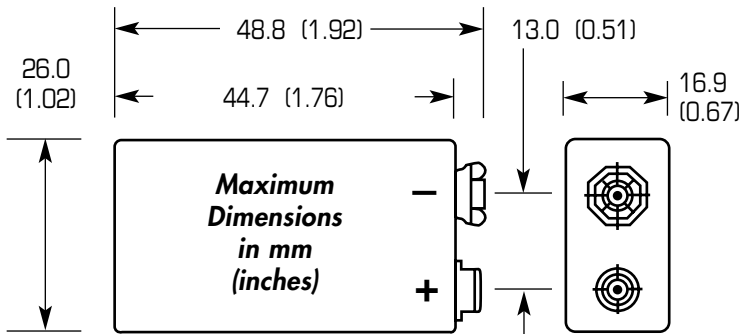

System:	Lithium/Manganese Dioxide
Designation:	NEDA 1604 LC
Nominal Voltage:	9.0 Volts
Capacity (C):	1,200 mAh @ 900 Ω to 5.4V @ 23°C
Max. Discharge:	120 mA Continuous
Weight:	33.8 grams
Oper. Temp. Range:	-20° to 60°C
Storage Temp. Range:	-40° to 60°C
Volume:	21.4 cm <sup>3</sup>
Terminals:	Miniature Snap
Housing:	Plastic/Foil Label
Safety:	Less than 2 grams of lithium; no restrictions on transport; MSDS available separately

\* Sold in Foil Packs only - as U9VL-FP

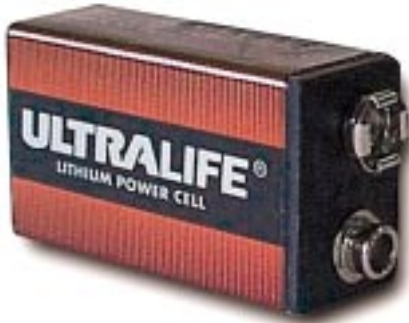

Recognized under the Component Program of Underwriters Laboratories, Inc.

