



### Lithium/Manganese Dioxide Battery

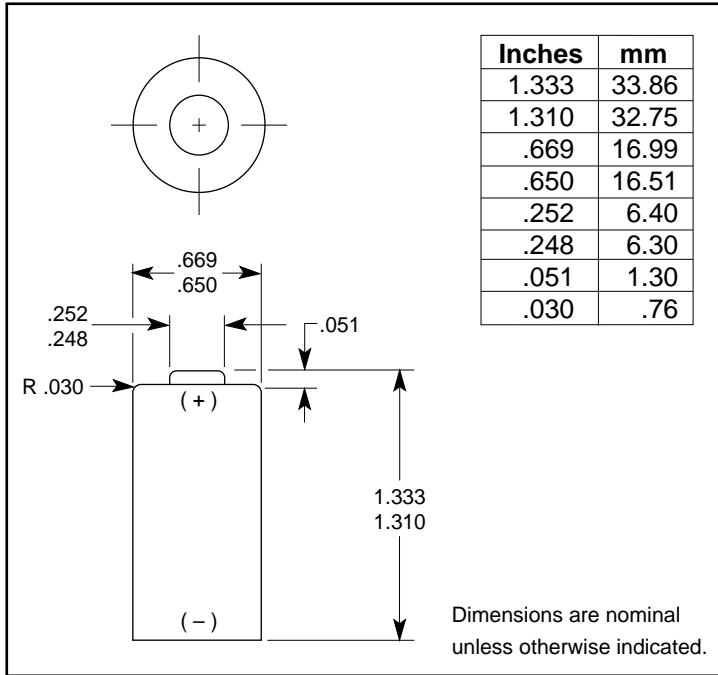

#### SPECIFICATIONS

<b>Nominal Voltage:</b>	3.0 V
<b>Typical Voltage:</b>	3.2 – 3.3 V
<b>Rated Capacity:</b>	1,400 mAh at 100 Ω to 2.0 V at 20°C (68°F)
<b>Average Weight:</b>	0.60 oz. (17.0 g)
<b>Volume:</b>	0.438 in. <sup>3</sup> (7.18 cm <sup>3</sup> )
<b>Terminals:</b>	Flat Negative End
<b>Operating Temp. Range:</b>	-40°C to 60°C (-40°F to 140°F)
<b>NEDA/ANSI:</b>	5017 LC
<b>IEC:</b>	CR17335


Note: For nonuser-replaceable applications such as battery packs and memory retention, component cell available with printed circuit board pins.

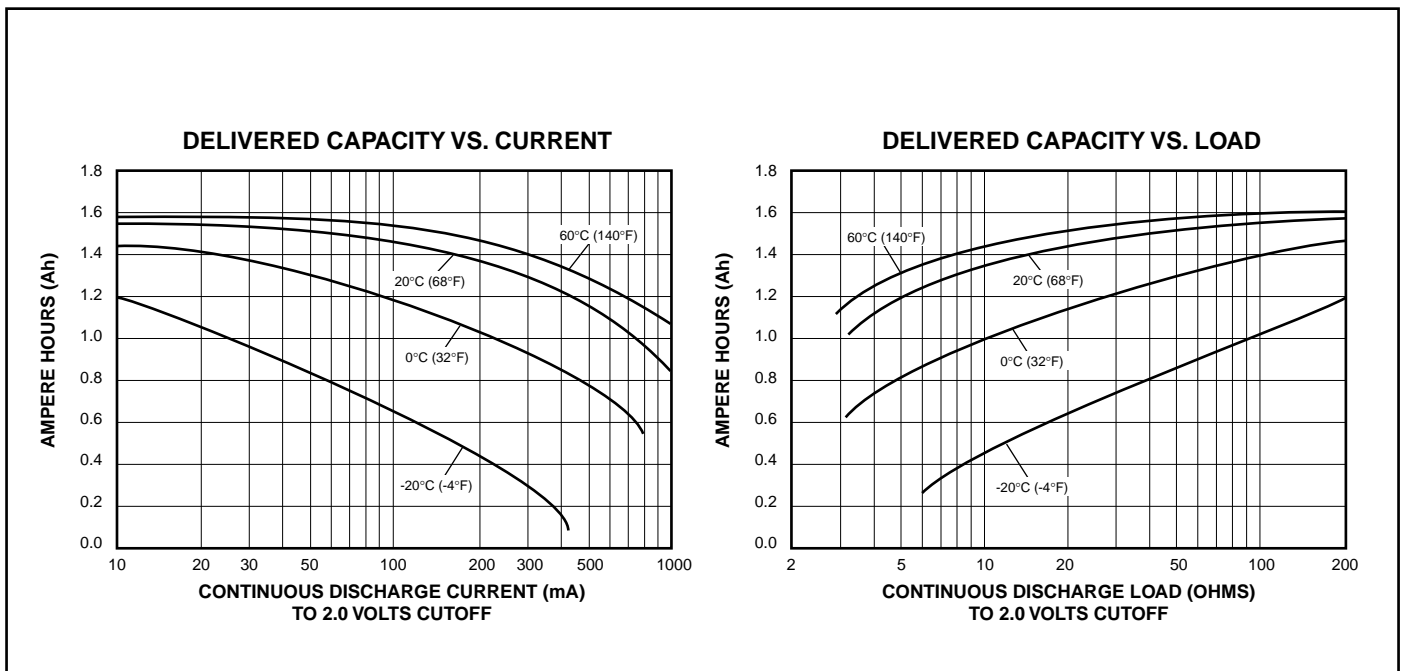


## DURACELL INC.

New Products and Technology Division  
 Berkshire Corporate Park  
 Bethel, CT 06801 U.S.A.  
 Telephone: Toll-free 1-800-431-2656  
 Outside North America: 203-791-3274  
 Facsimile: 203-791-3273  
 Internet: www.duracellnpt.com


**CONTINUOUS DISCHARGE AT 60°C (140°F)**

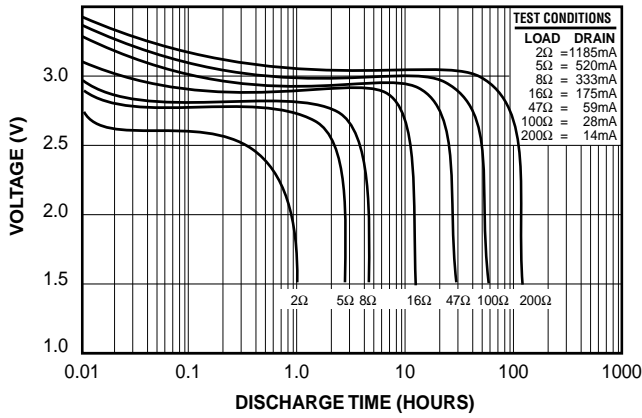


**CONTINUOUS DISCHARGE AT 20°C (68°F)**

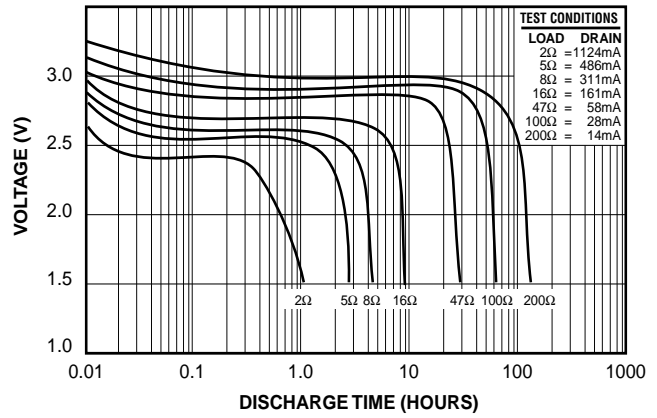


**CONTINUOUS DISCHARGE AT 0°C (32°F)**

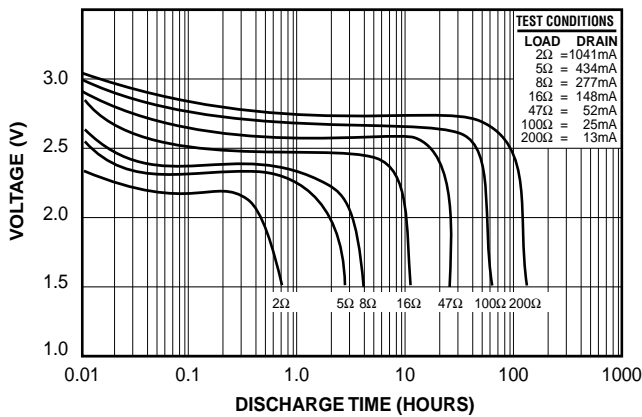

**CONTINUOUS DISCHARGE AT -20°C (-4°F)**

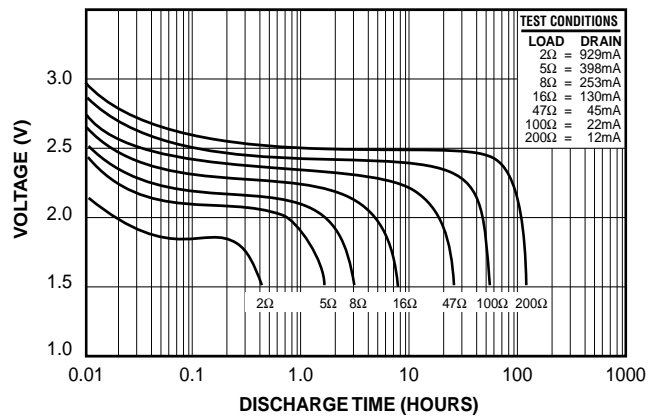

**PULSE DISCHARGE AT DIFFERENT DUTY CYCLES  
1.2A, AT 20°C (68°F)**

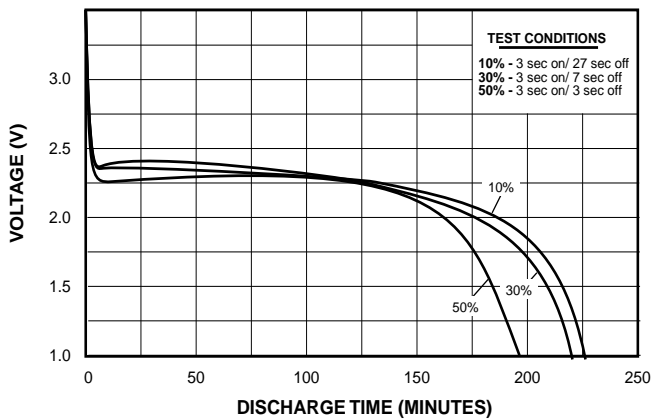

**CONTINUOUS DISCHARGE UNDER  
MICROAMPERE DRAINS AT 20°C (68°F)**

